

Pulsed magnet control system using COTS PXIE devices and LabVIEW



Yoshinori Enomoto (KEK)

1. Introduction
2. Overview of the system
3. PXI / PXI express devices
4. Software
5. Evaluation and Operation
6. Summary


Key words : Event Timing System, EPICS, LabVIEW, PXI / PXI express



Accelerator complex in KEK Tsukuba

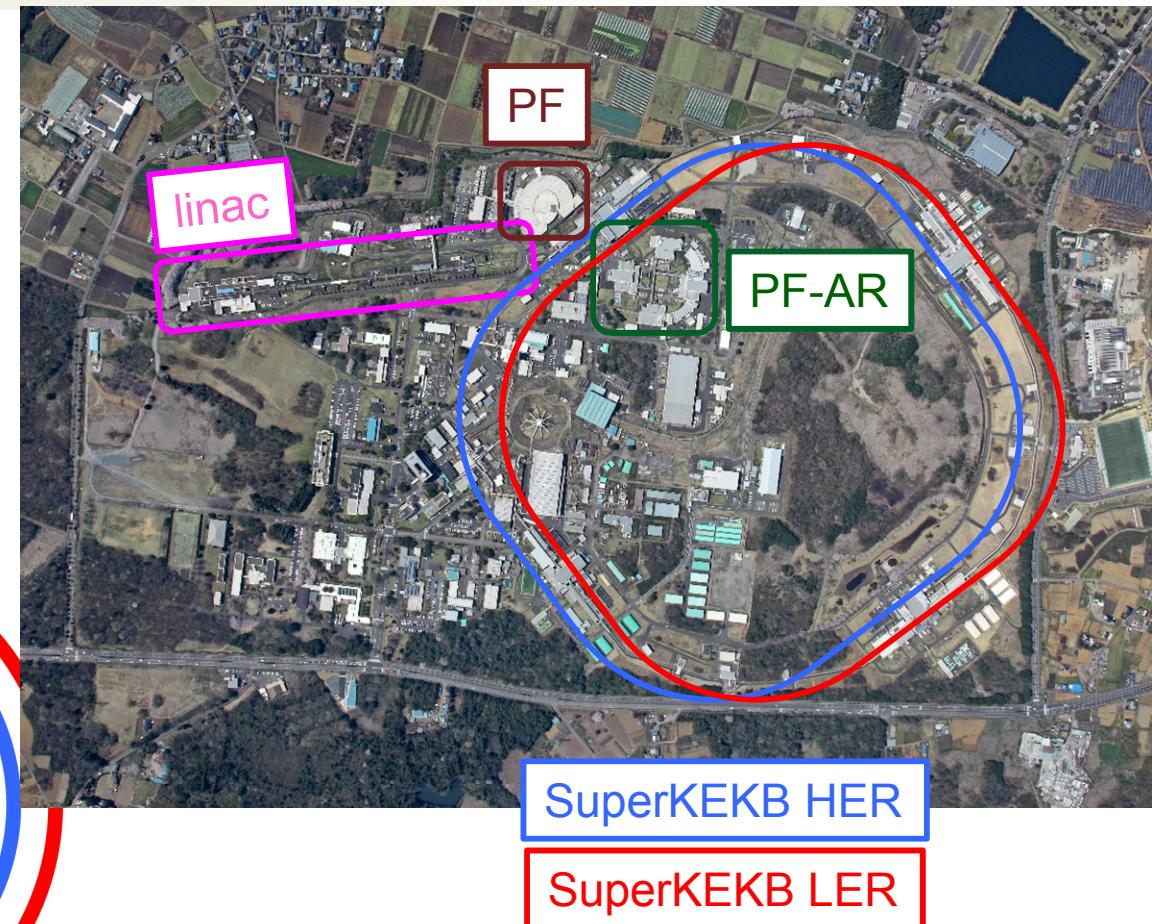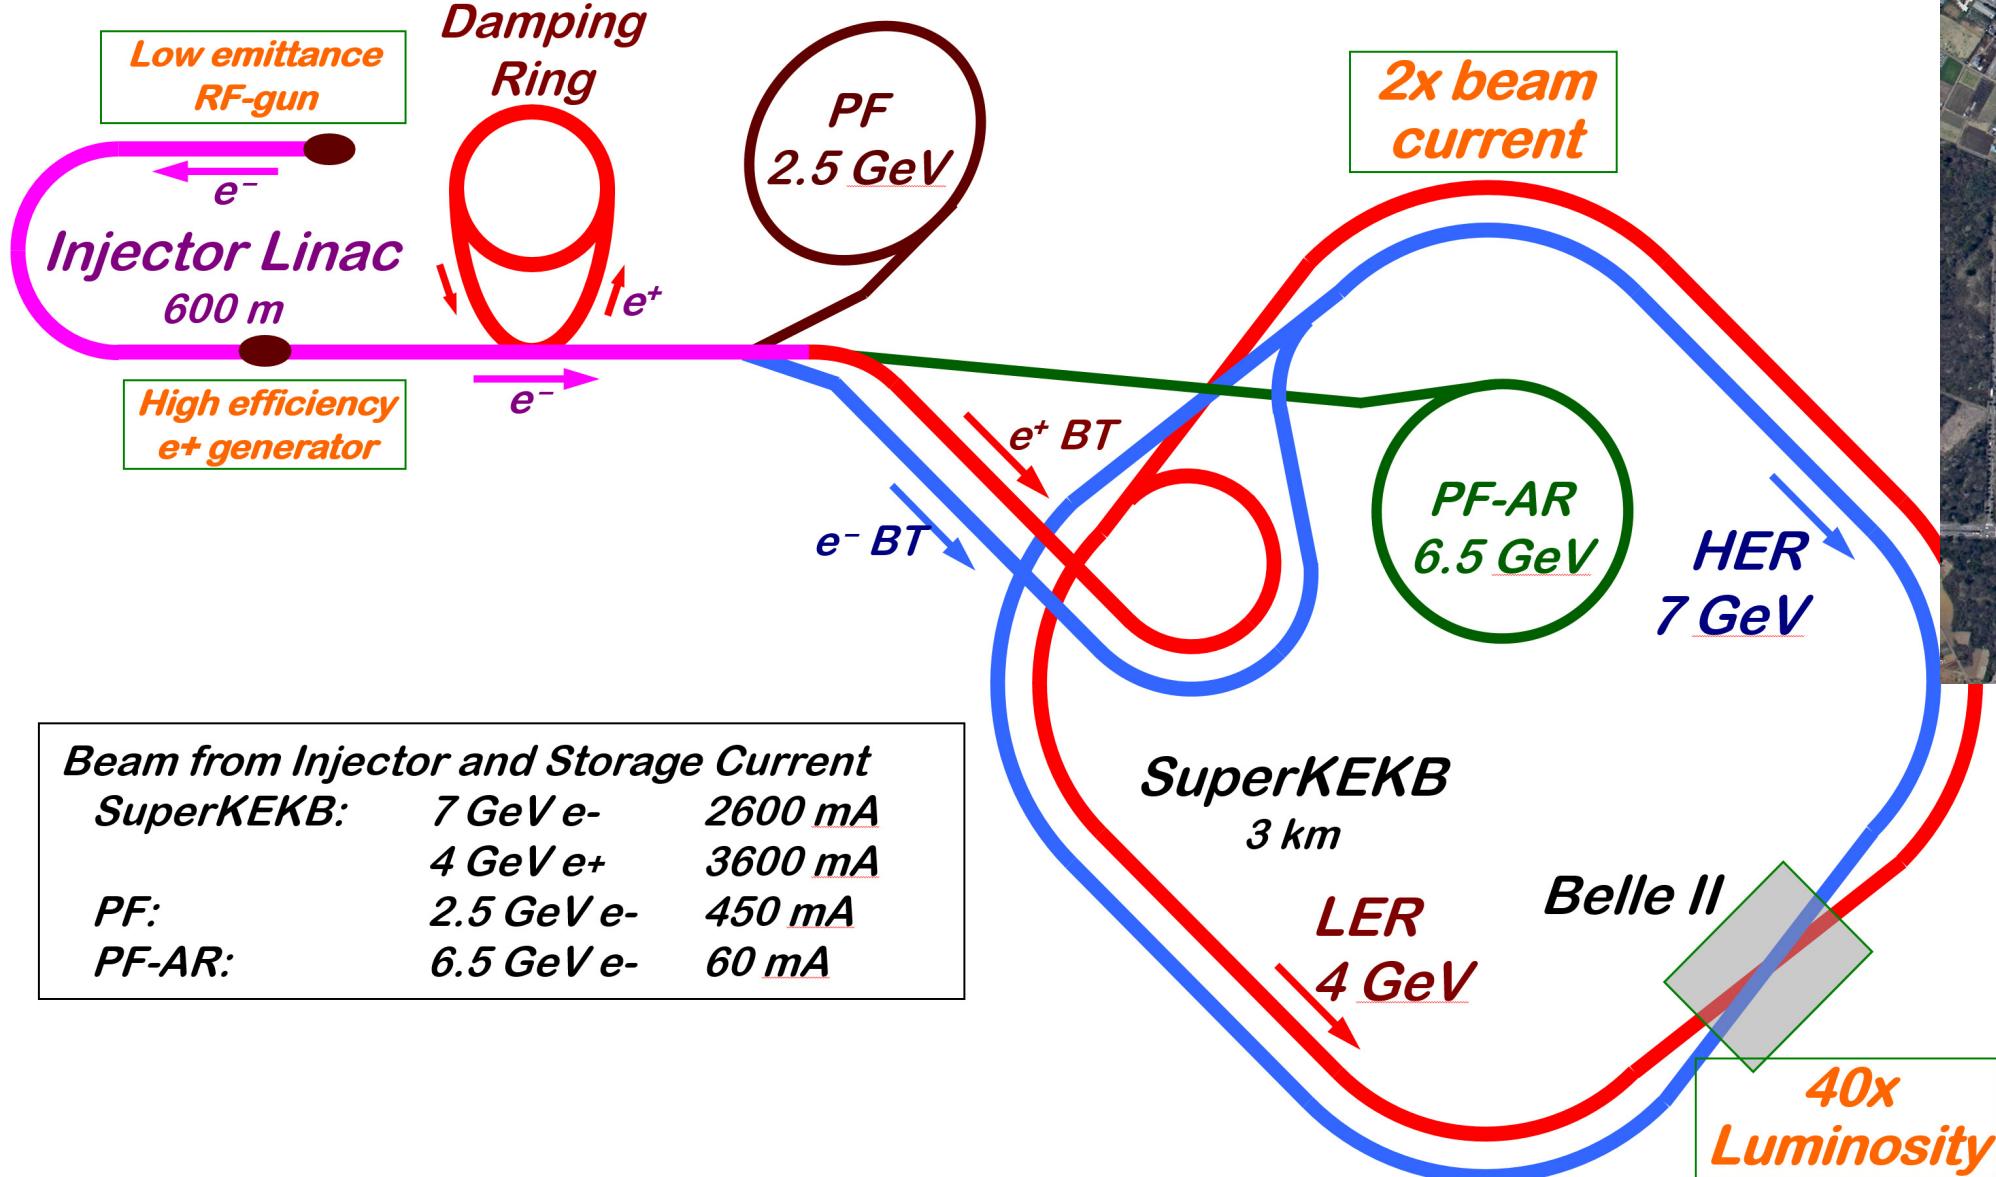


Accelerator complex in KEK Tsukuba

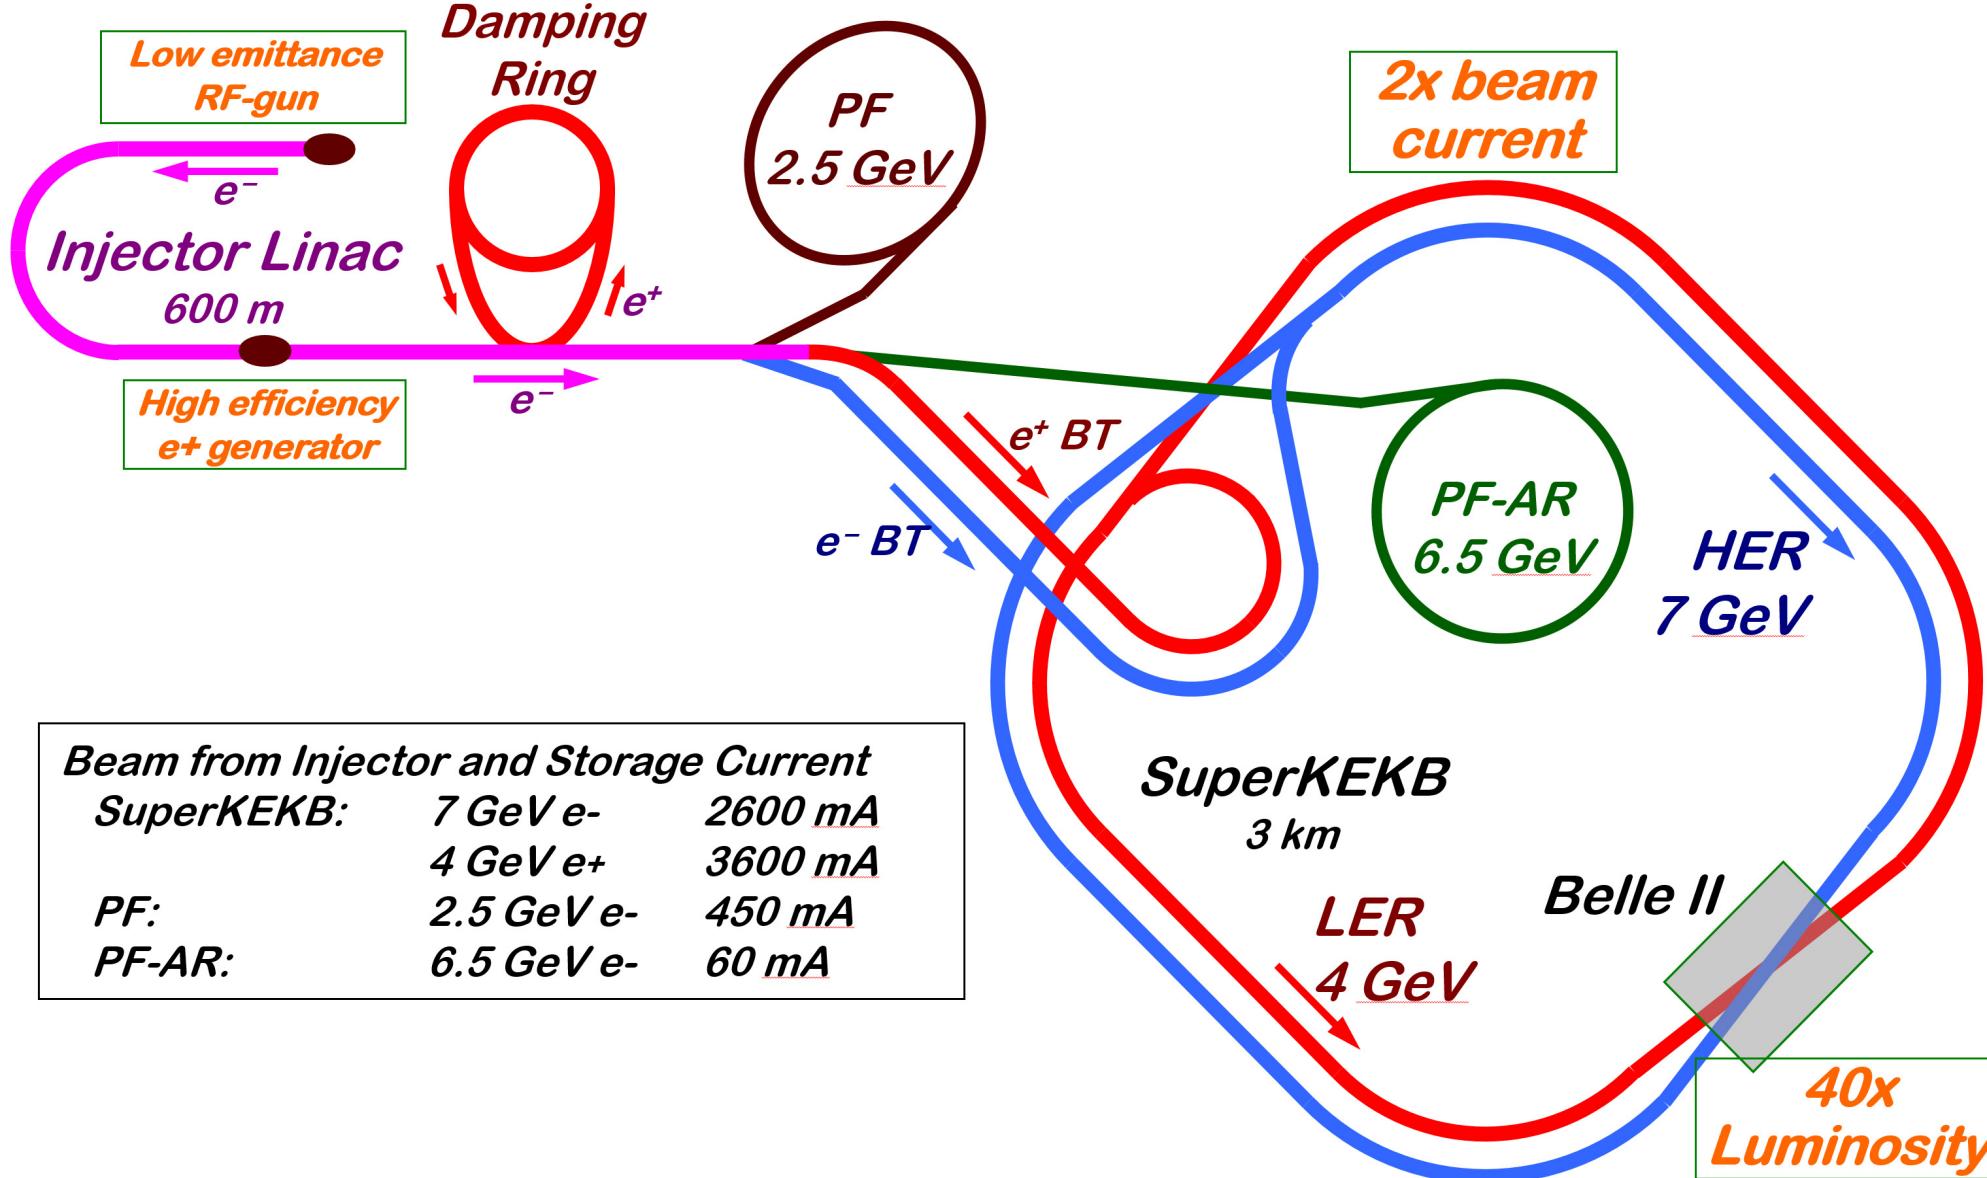

- 4 rings and 1 linac
 - Two light source rings
 - PF, PF-AR
 - Two collider rings
 - SuperKEKB LER, HER
- Parallel configuration
 - No booster ring
- All storage rings
 - Full energy injection
- Top-up injection
- Two electron guns
 - RF gun for low emittance injection to SuperKEKB HER
 - Thermionic gun for high charge (10 nC) to produce large number of positrons
- Positron injection to LER



Our linac is an all-in-one injector

Accelerator complex in KEK Tsukuba

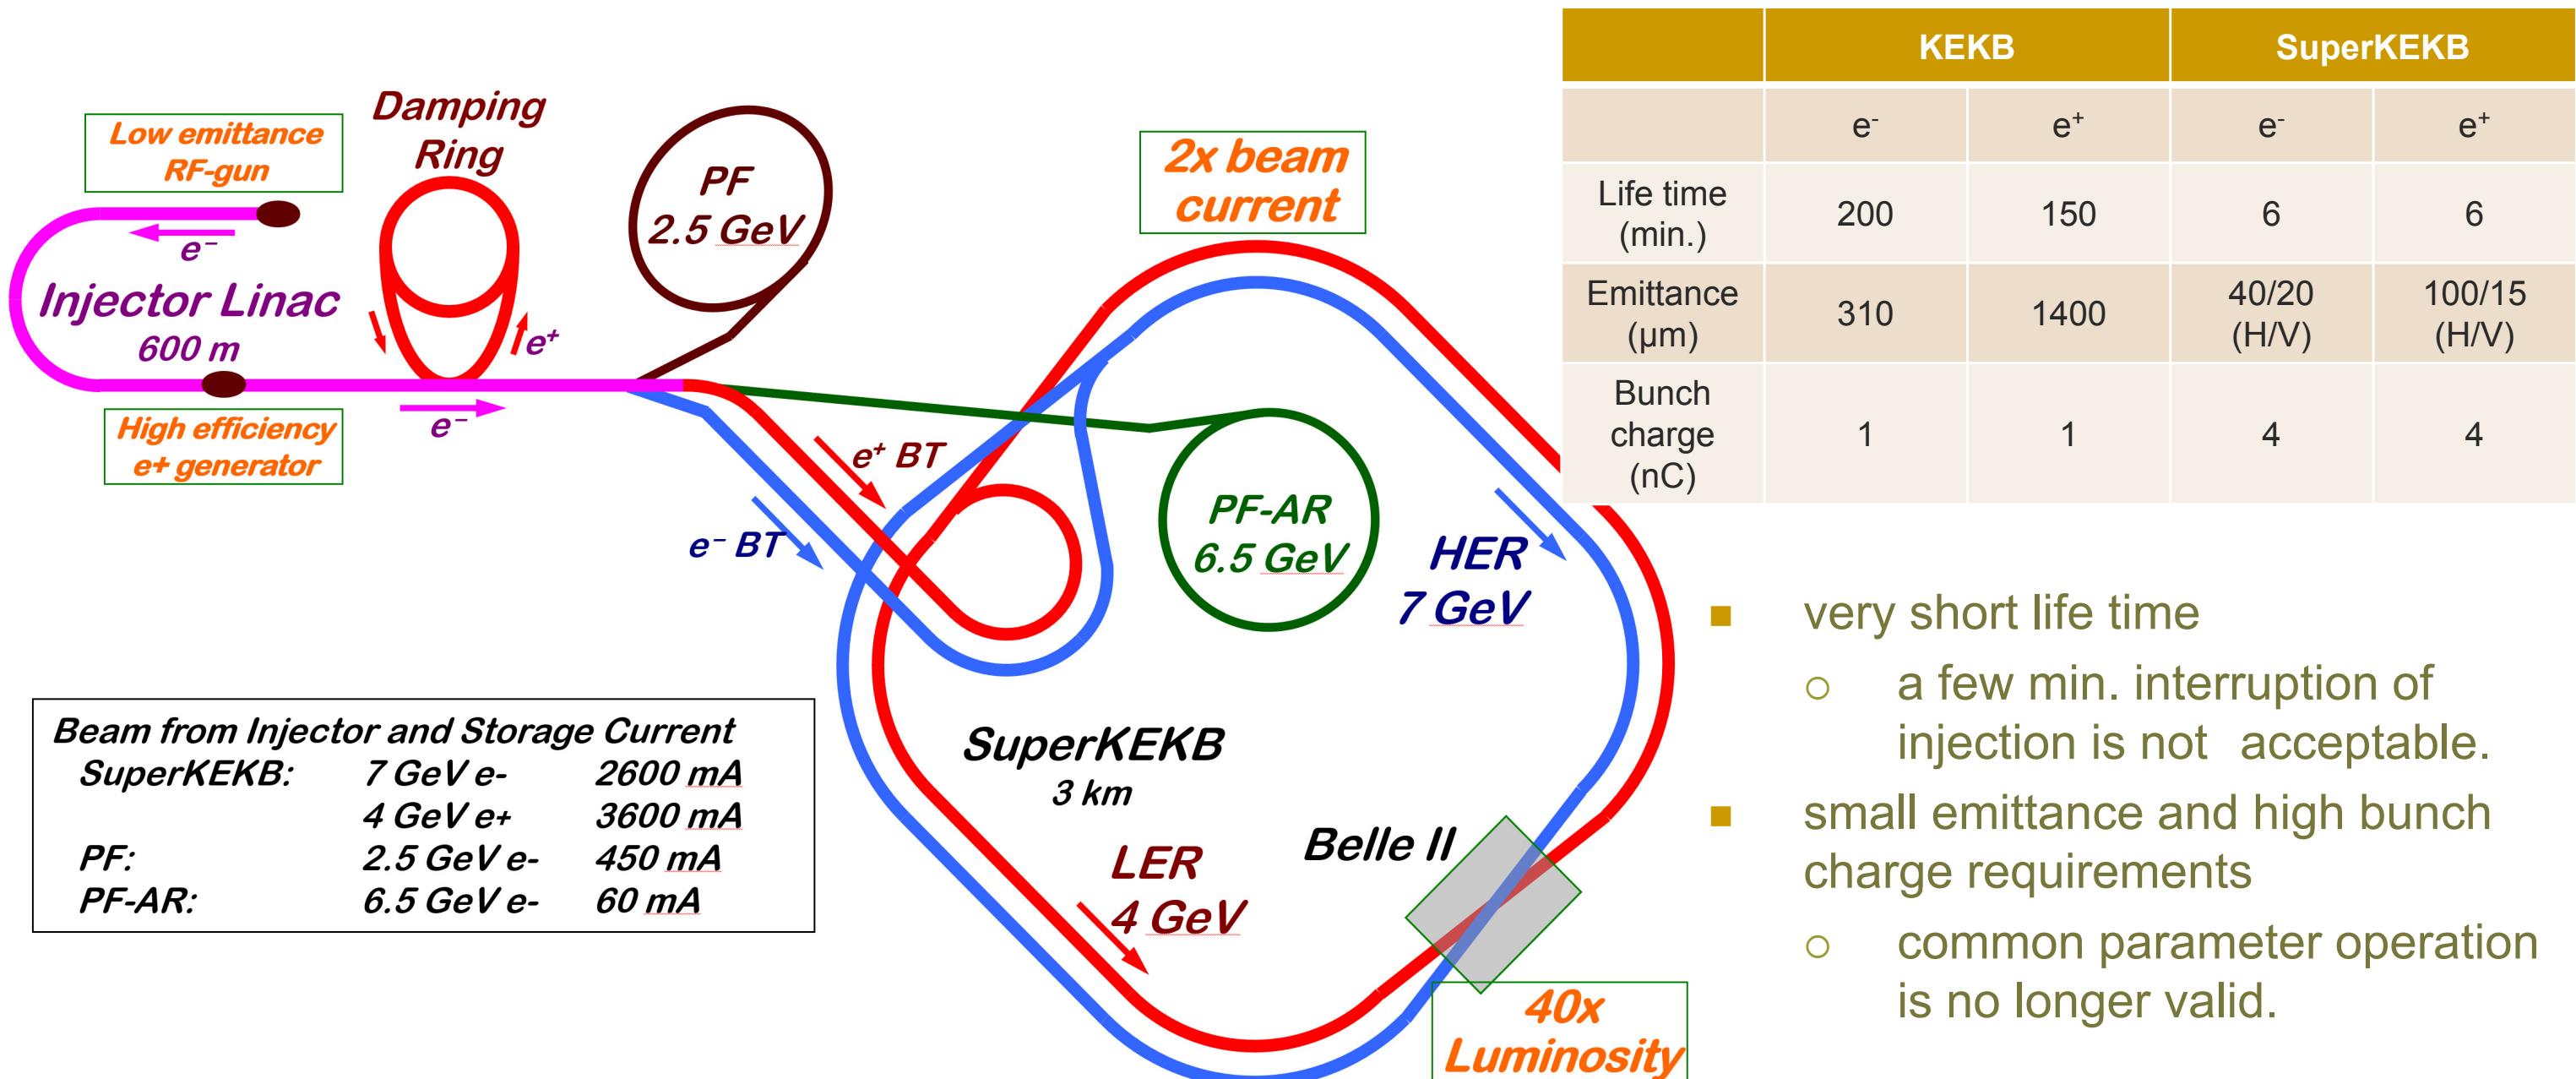

Simultaneous (shot by shot) injection with different magnet parameter at 50 Hz is necessary

Beam energy and structure of our linac

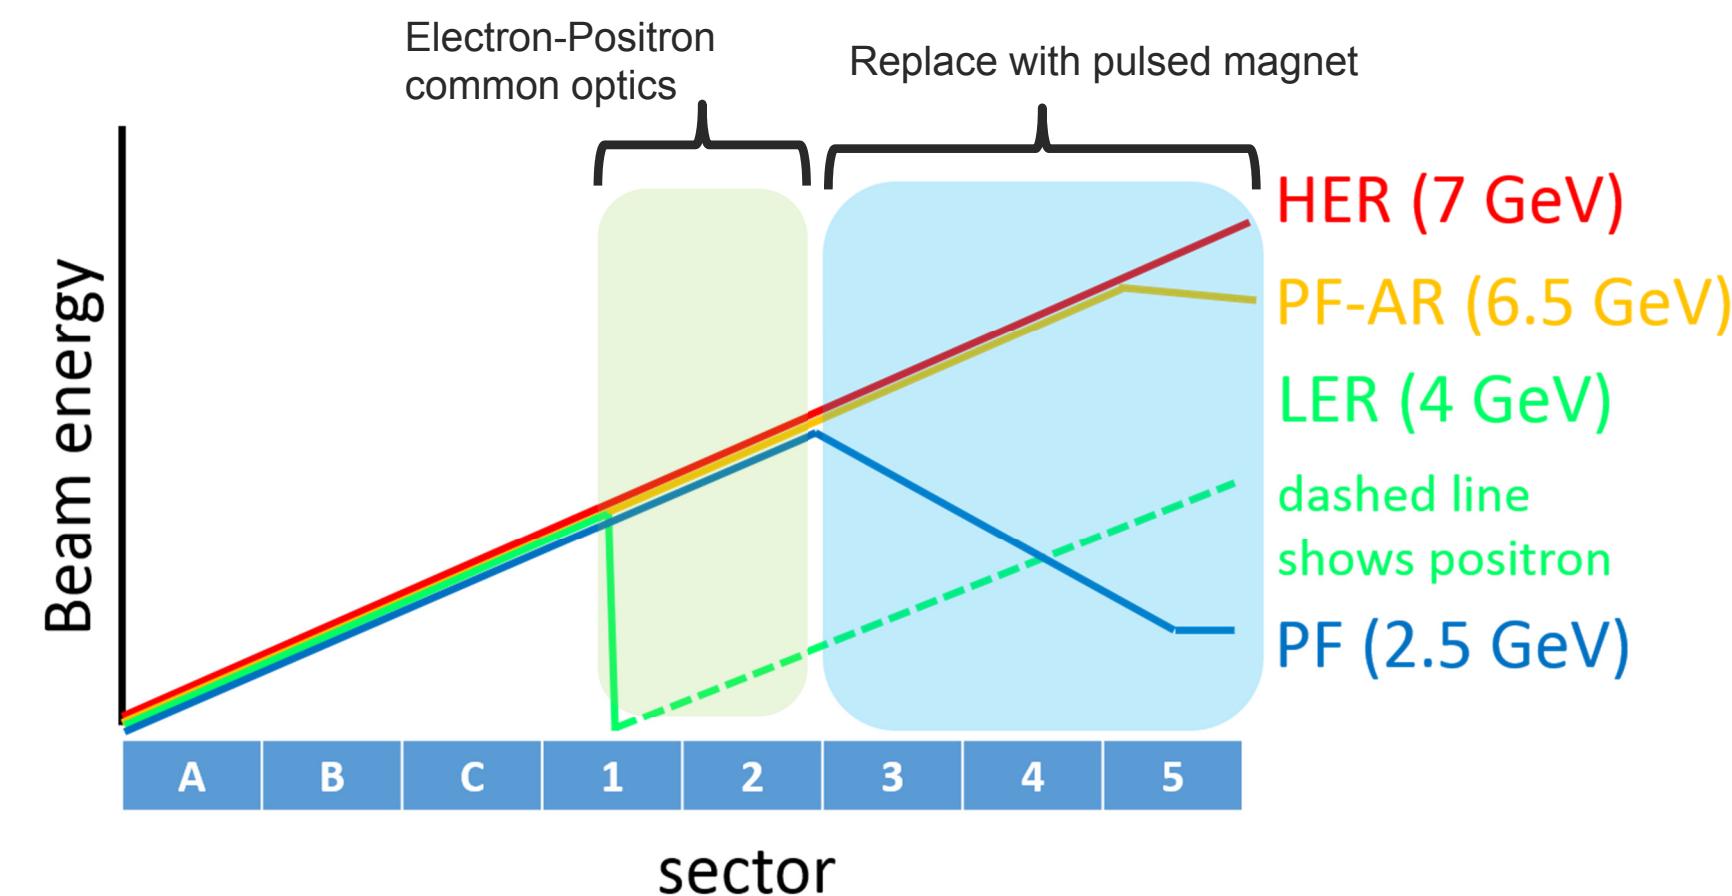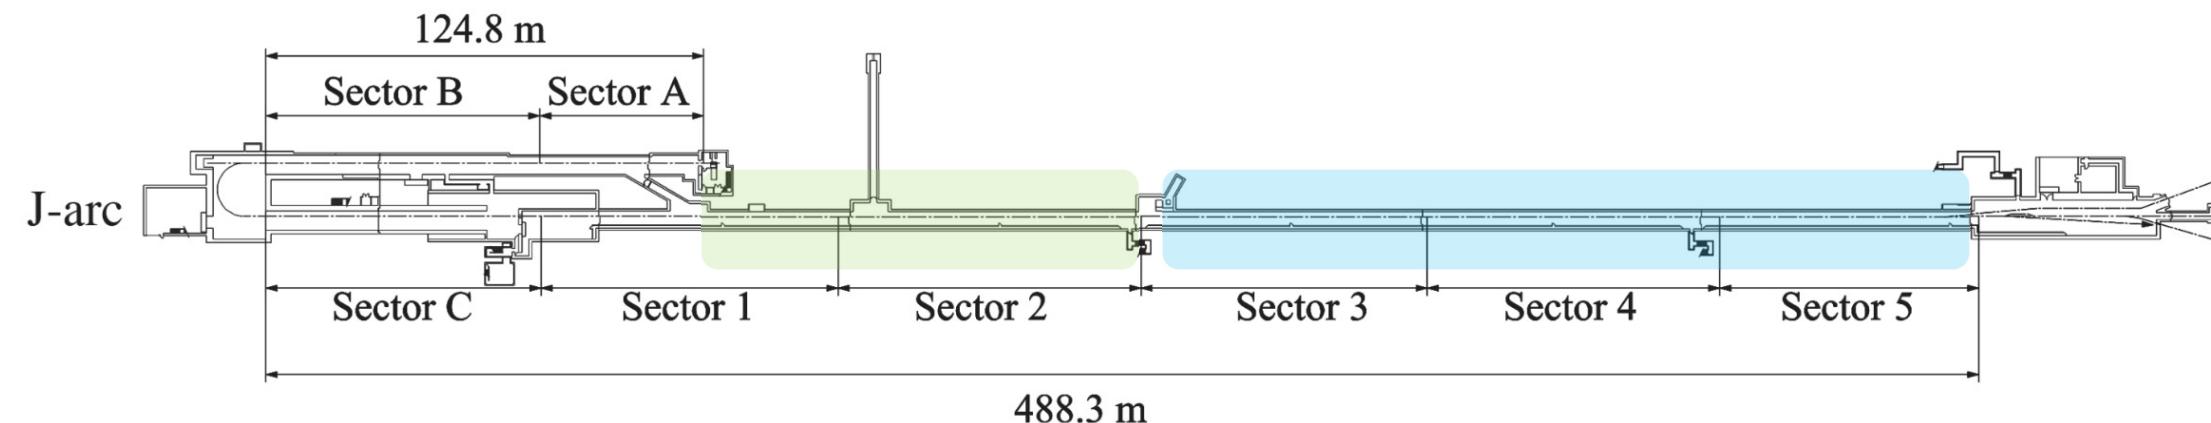

- 600 m long, 8 sectors
- Maximize common energy section to use DC magnets as much as possible
- Install pulsed magnets mainly in sector 3 to sector 5

Bend	2
Quadrupole	32
steering	58

How to realize?

- Requirements
 - Low cost and high reliability
 - We need 100 unit
 - Flexible setting
 - On / off control is not enough
 - Small size
 - compatible with old DC power supply
 - High efficiency
 - compatible with old DC power supply
 - MRF Event Timing System
 - Compatible with existent timing system
 - EPICS
 - Compatible with existent control system
 - Limited time and human resources for development
 - That is why I write software....

How to realize?

- Requirements
 - Low cost and high reliability
 - We need 100 unit
 - Flexible setting
 - On / off control is not enough
 - Small size
 - compatible with old DC power supply
 - High efficiency
 - compatible with old DC power supply
 - MRF Event Timing System
 - Compatible with existent timing system
 - EPICS
 - Compatible with existent control system
 - Limited time and human resources for development
 - That is why I write software....
- Our strategy is
 - Separation of power and control unit.
 - Develop power circuit by ourselves
 - Use commercially available devices as much as possible for control system
 - Use LabVIEW for programming language
 - Use standard windows PC for CPU

How to realize?

- Requirements
 - Low cost and high reliability
 - We need 100 unit
 - Flexible setting
 - On / off control is not enough
 - Small size
 - compatible with old DC power supply
 - High efficiency
 - compatible with old DC power supply
 - MRF Event Timing System
 - Compatible with existent timing system
 - EPICS
 - Compatible with existent control system
 - Limited time and human resources for development
 - That is why I write software....
- Our strategy is
 - Separation of power and control unit.
 - Develop power circuit by ourselves
 - Use commercially available devices as much as possible for control system
 - Use LabVIEW for programming language
 - Use standard windows PC for CPU

This is yet another solution for medium scale system

How to realize?



- Requirements
 - Low cost and high reliability
 - We need 100 unit
 - Flexible setting
 - On / off control is not enough
 - Small size
 - compatible with old DC power supply
 - High efficiency
 - compatible with old DC power supply
 - MRF Event Timing System
 - Compatible with existent timing system
 - EPICS
 - Compatible with existent control system
 - Limited time and human resources for development
 - That is why I write software....
- Our strategy is
 - Separation of power and control unit.
 - Develop power circuit by ourselves
 - Use commercially available devices as much as possible for control system
 - Use LabVIEW for programming language
 - Use standard windows PC for CPU

This is yet another solution for medium scale system


	Full custom		Catalog product
Suitable System scale	Large		Small
Development costs	High		Low
Development time	Long		Short
flexibility	High		Low

System configuration of the pulsed power supplies

Standard power supply unit (4 x quad + 4 x steering)

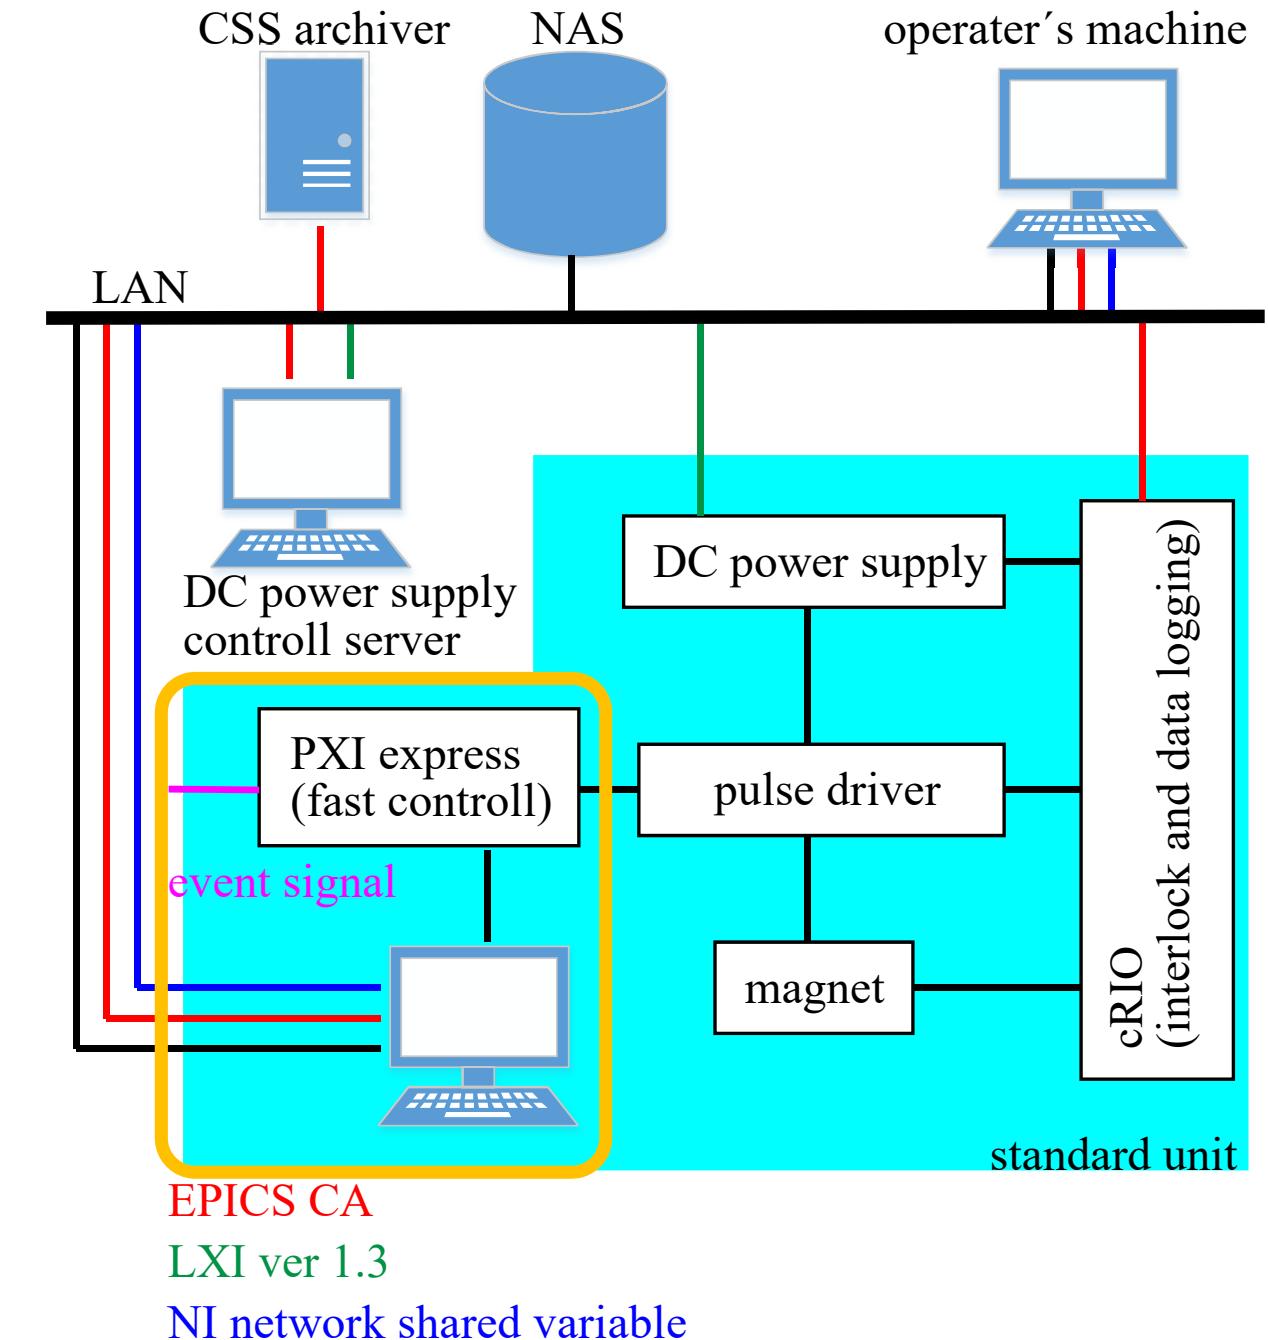
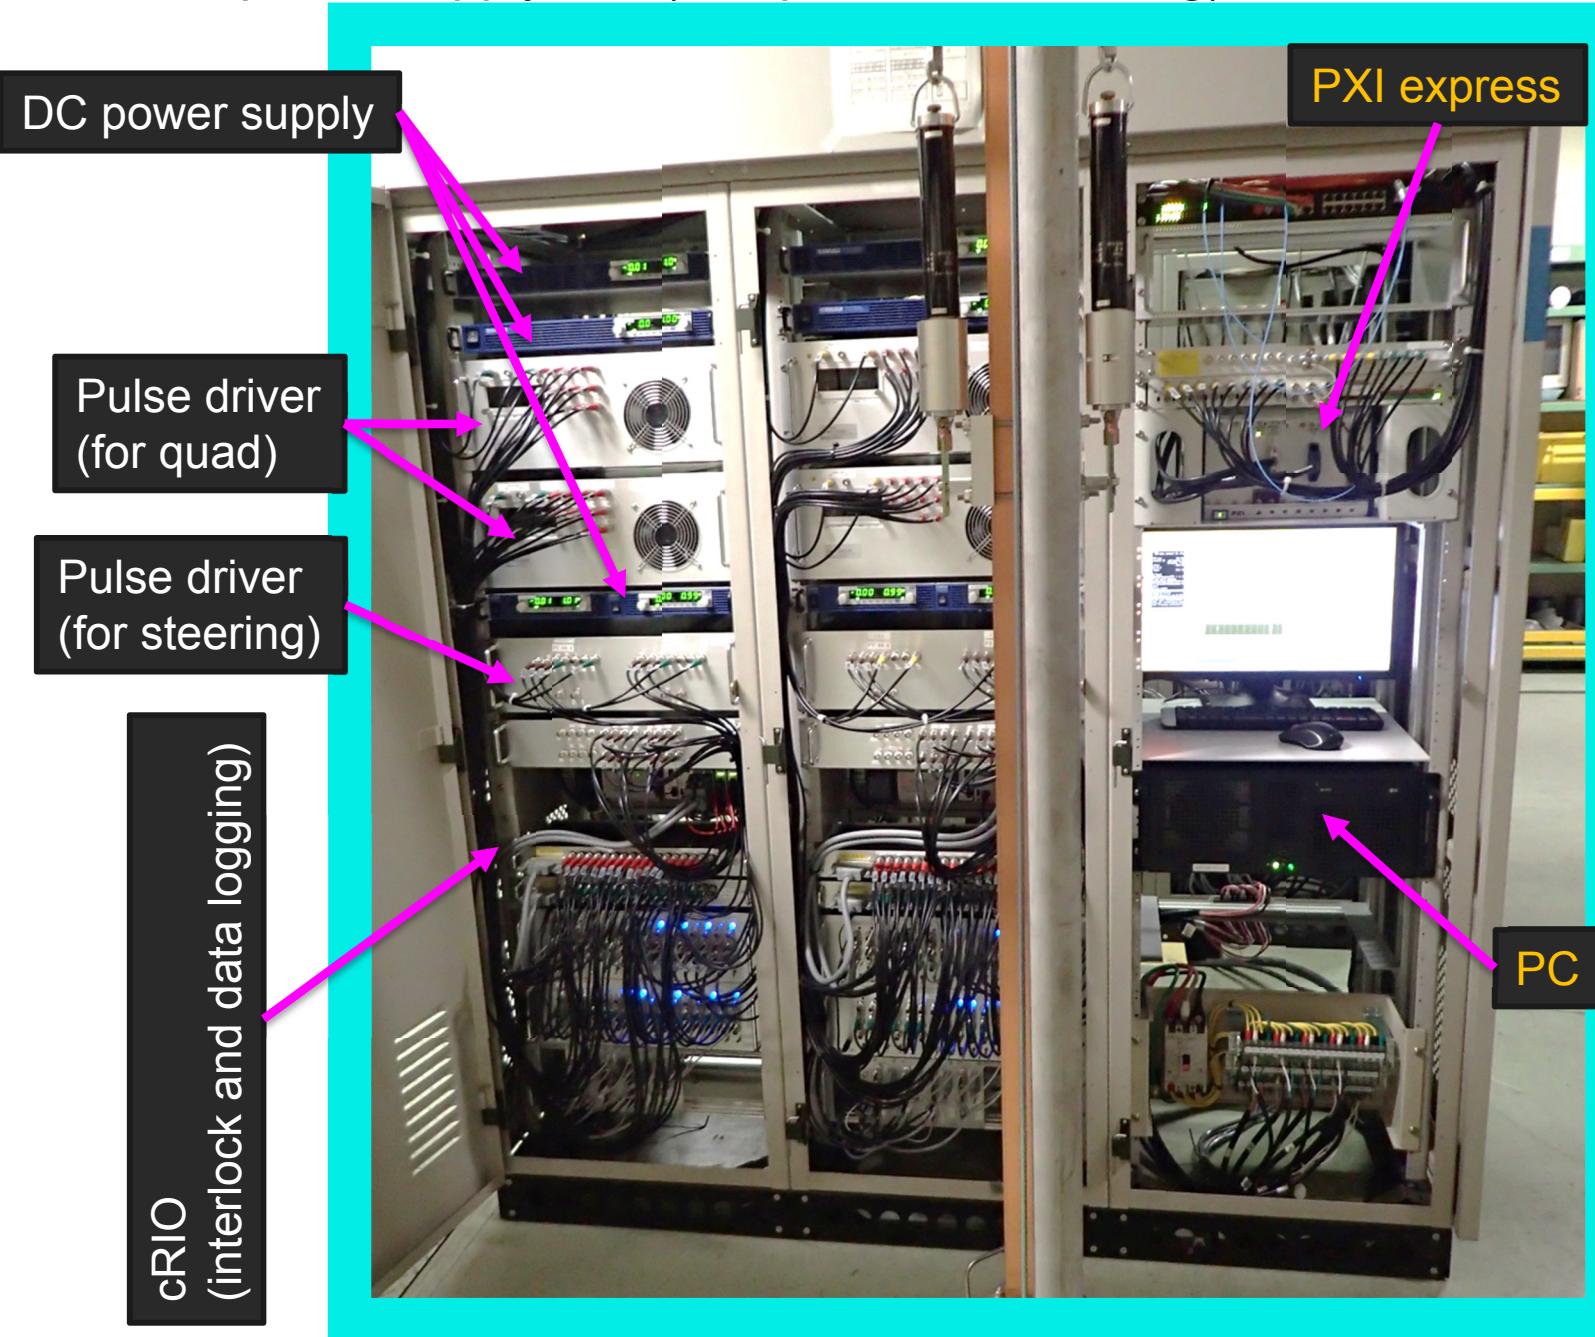


Timing and fast control

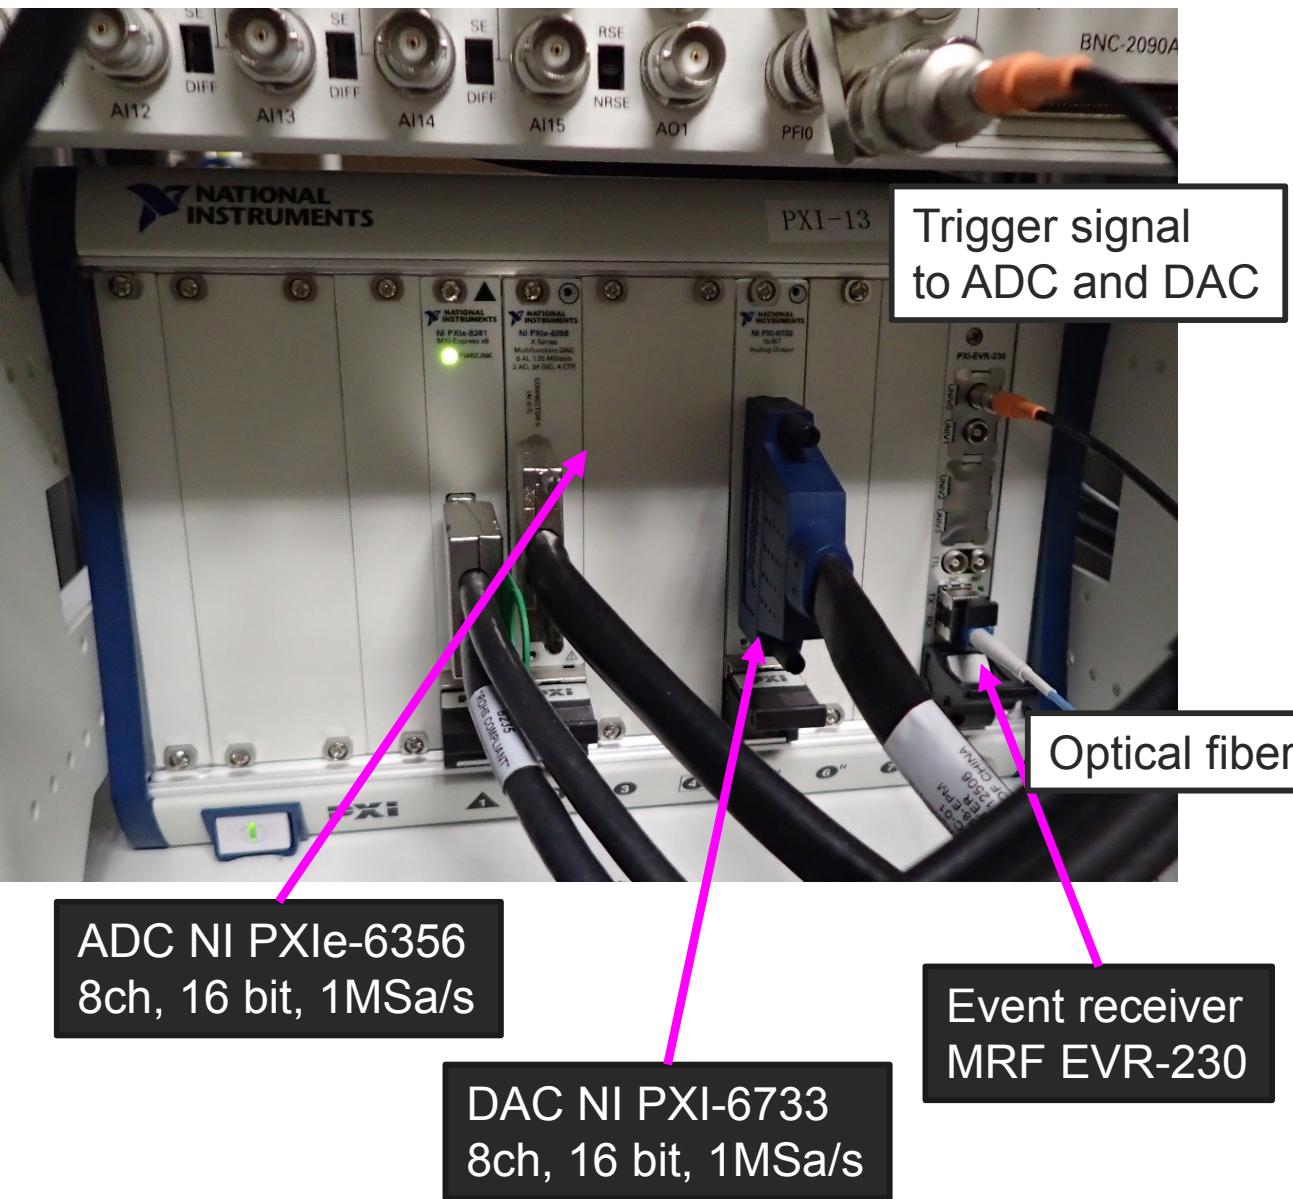

- PXI express system is adopted for fast control of the power supplies (8GB / s).
- All of the intelligent functions are processed by PXI express unit
 - Pulse driver works as a kind of power amplifier
 - Separation of control and power section makes it possible for us to flexible installation of different capacity of power supplies.
- MRF(Micro-Research Finland) event receiver with PXI form factor is used for timing control
 - MRF event timing system is used as a master timing system of our linac.
- Mode and shot ID information are sent to the event receiver via optical fiber
 - Mode determine the destination of the beam.
 - Shot ID is used for tagging the data.


EPICS and LabVIEW

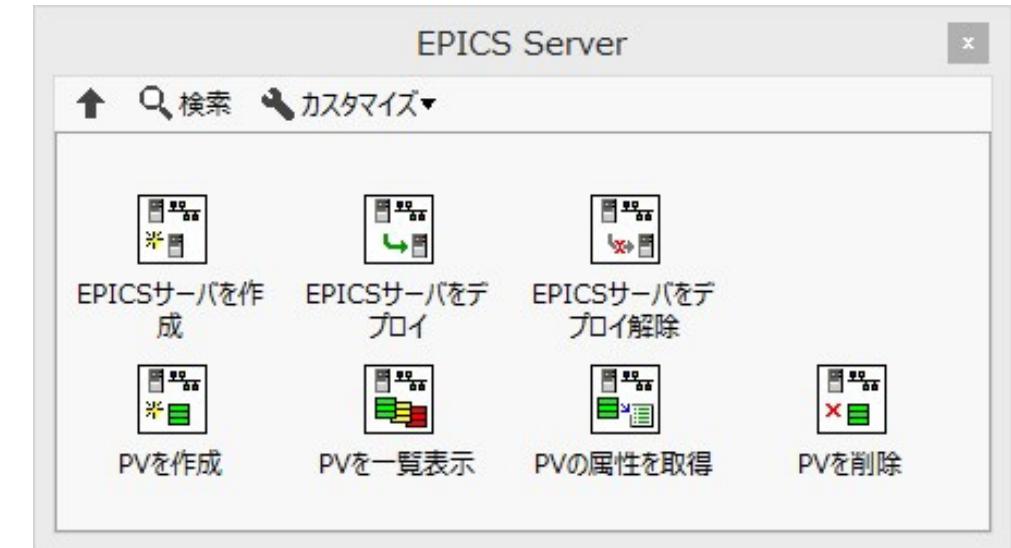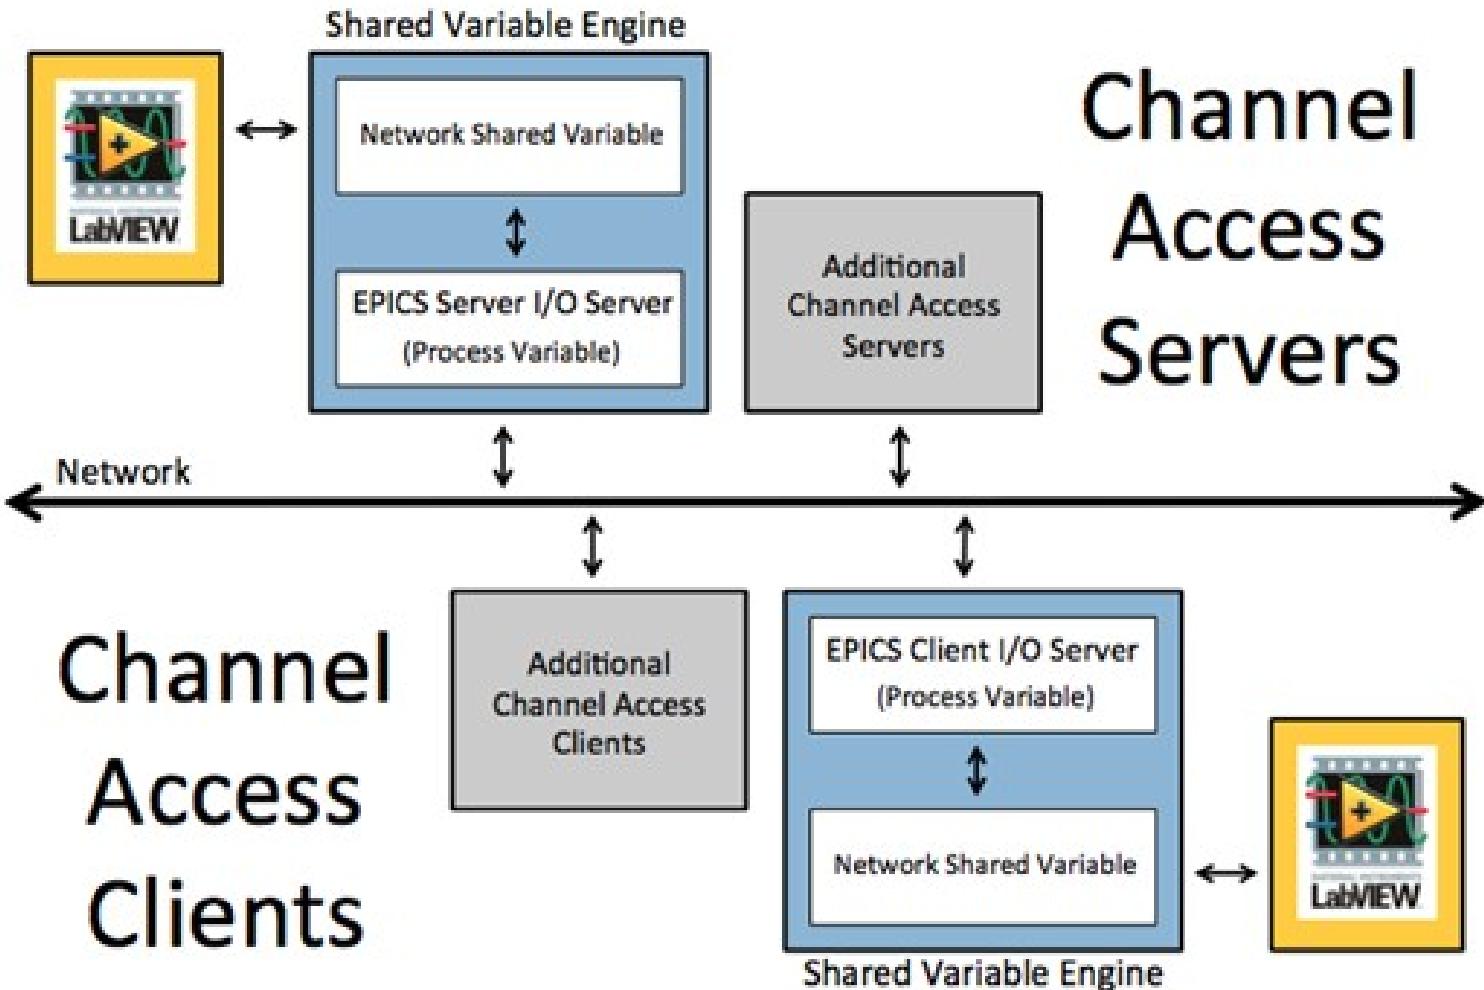

- Declare PVs
 - Dynamic declaration is possible only by LabVIEW running on Windows
- Get/put value
- Process by value change event


<https://www.ni.com/ja-jp/innovations/white-papers/12/introduction-to-epics.html>

Data flow in main program

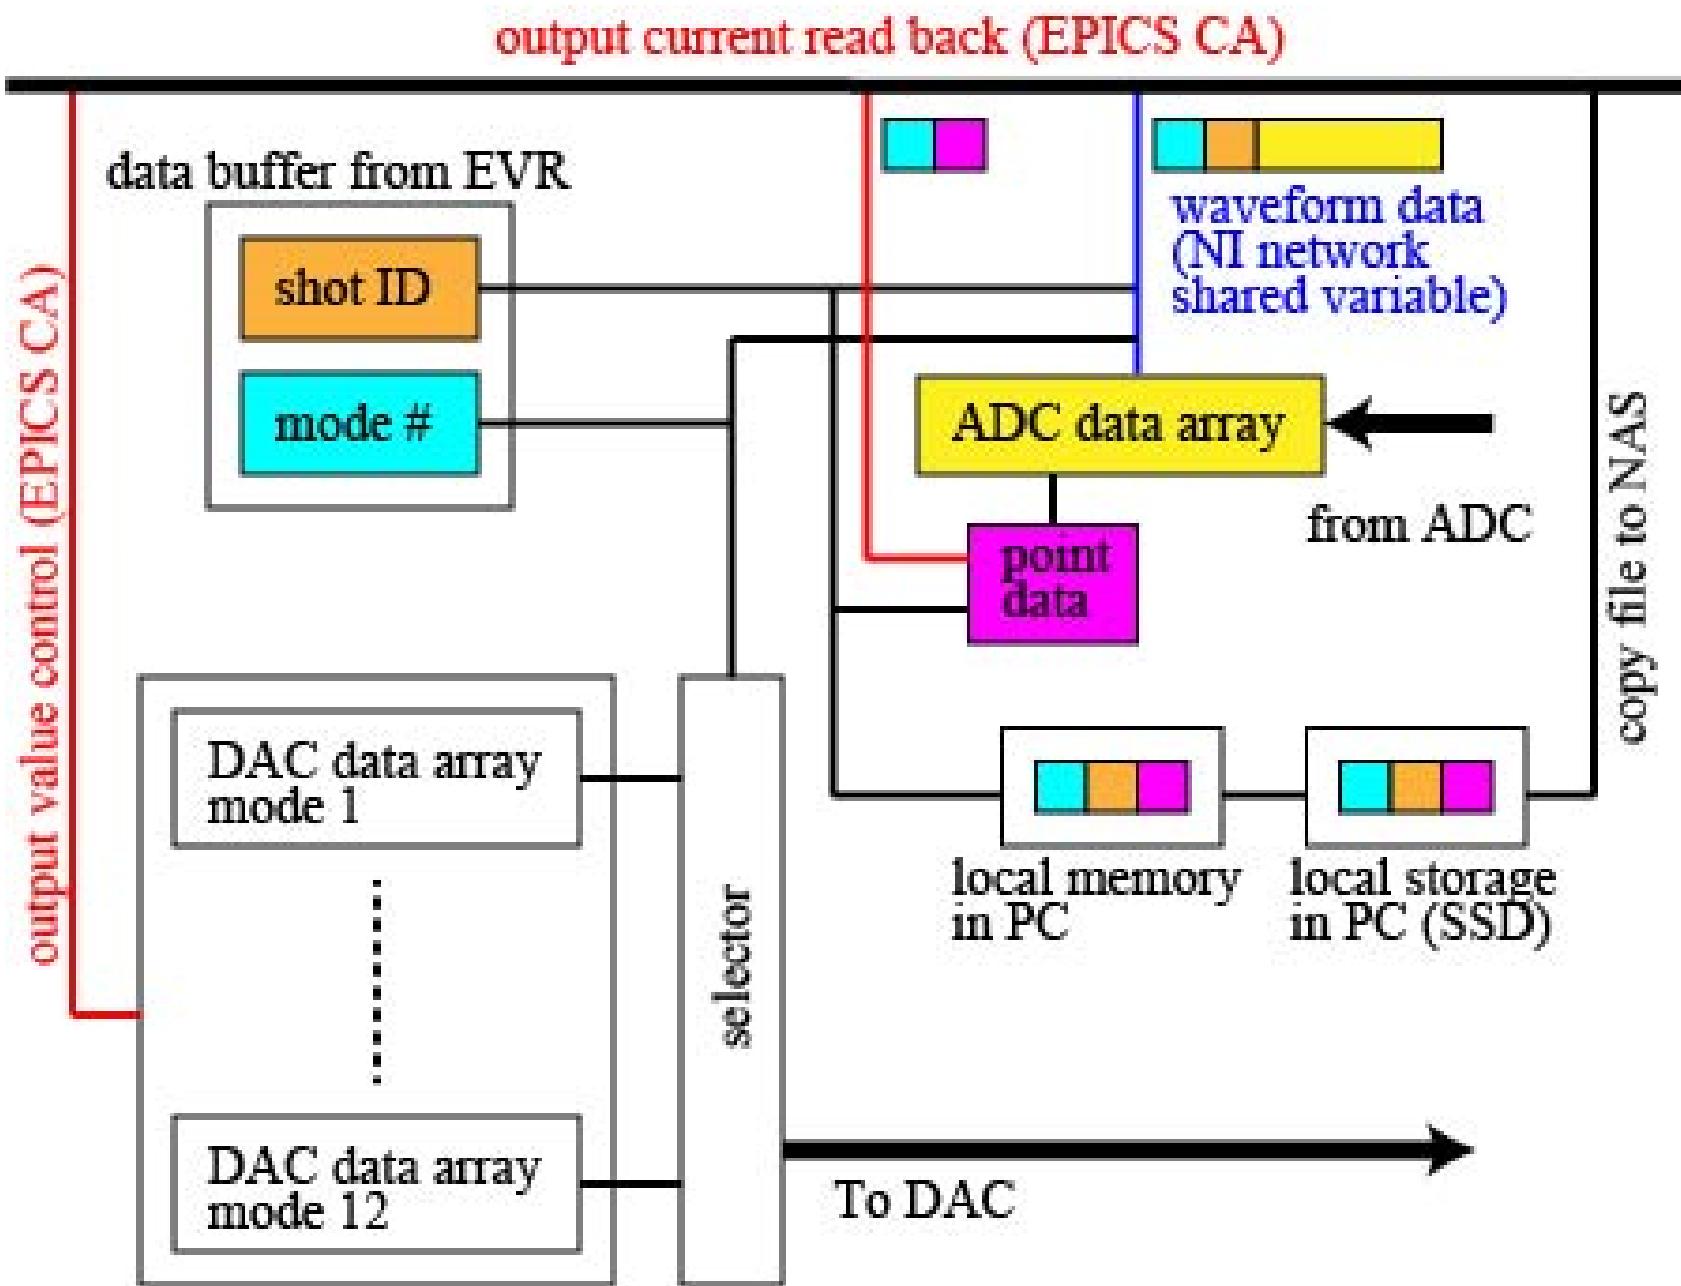


DAC output control


- Slew rate is limited by voltage of the power supply
- Beam timing t3 is fixed 3 ms after trigger pulse.
- Flat top width t2 is fixed 0.5 ms before t3
- V1 is always 10 V
- V2 is determined by value of output current
- t1 is calculated from other parameters
- DAC output is determined from these parameters

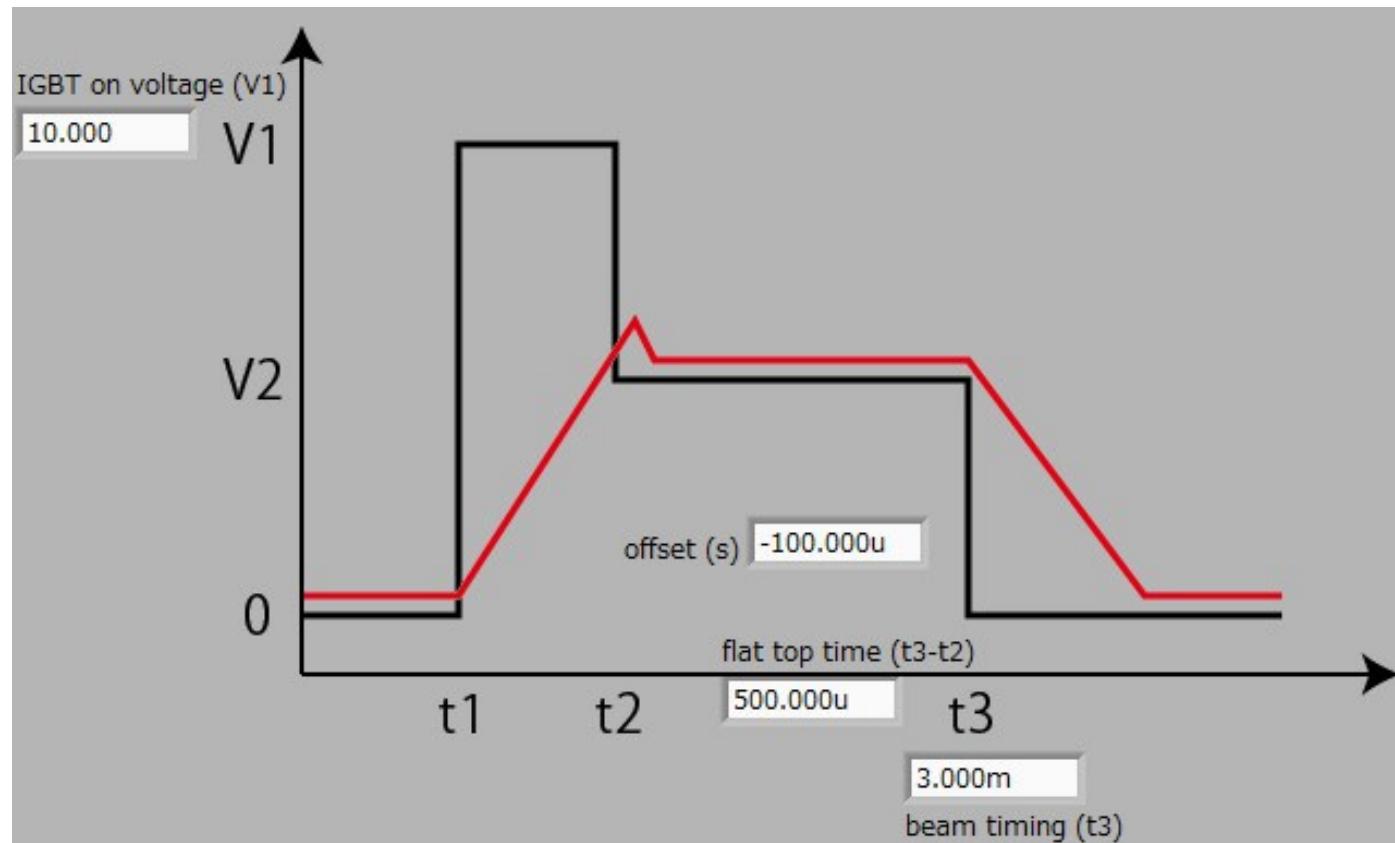

Minimize energy consumption


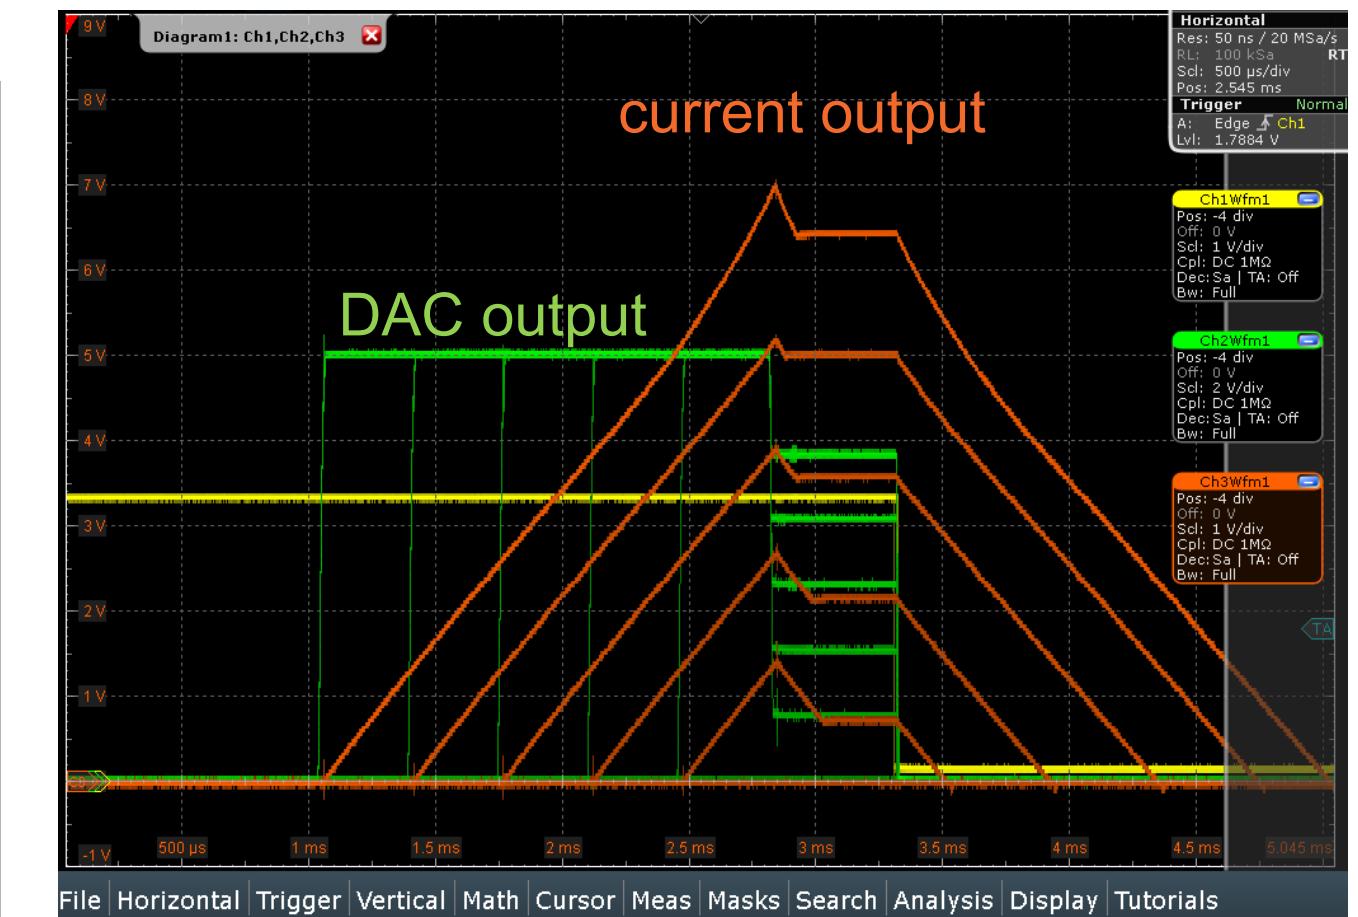


Data flow in main program


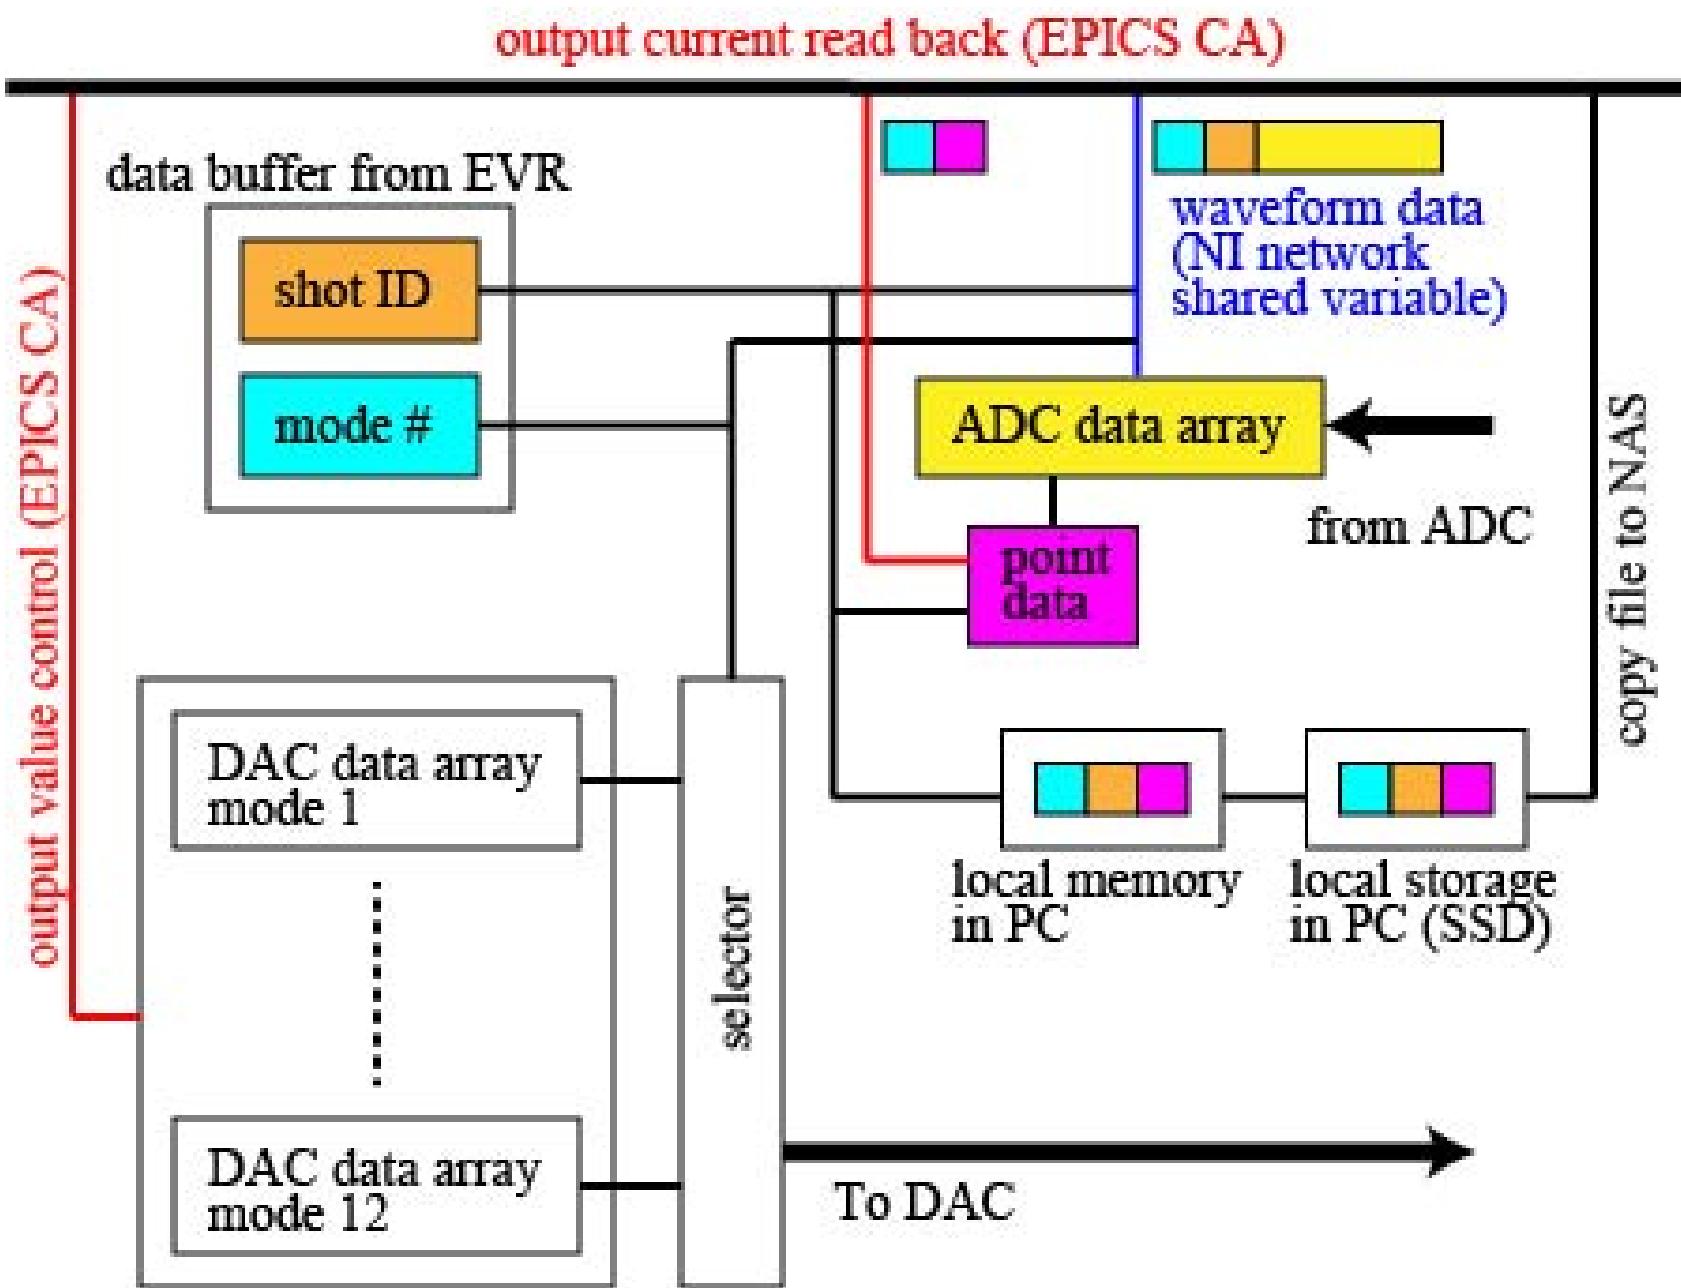


Data flow in main program

output value control (EPICS CA)

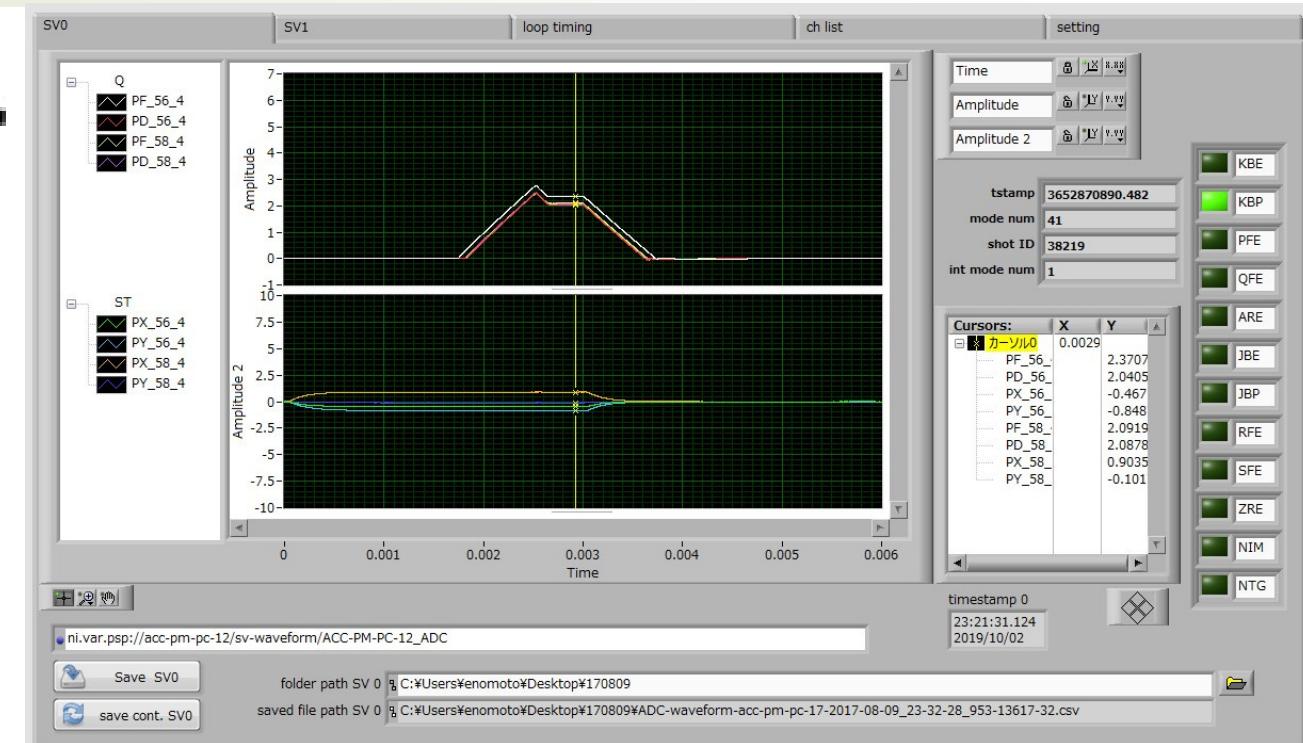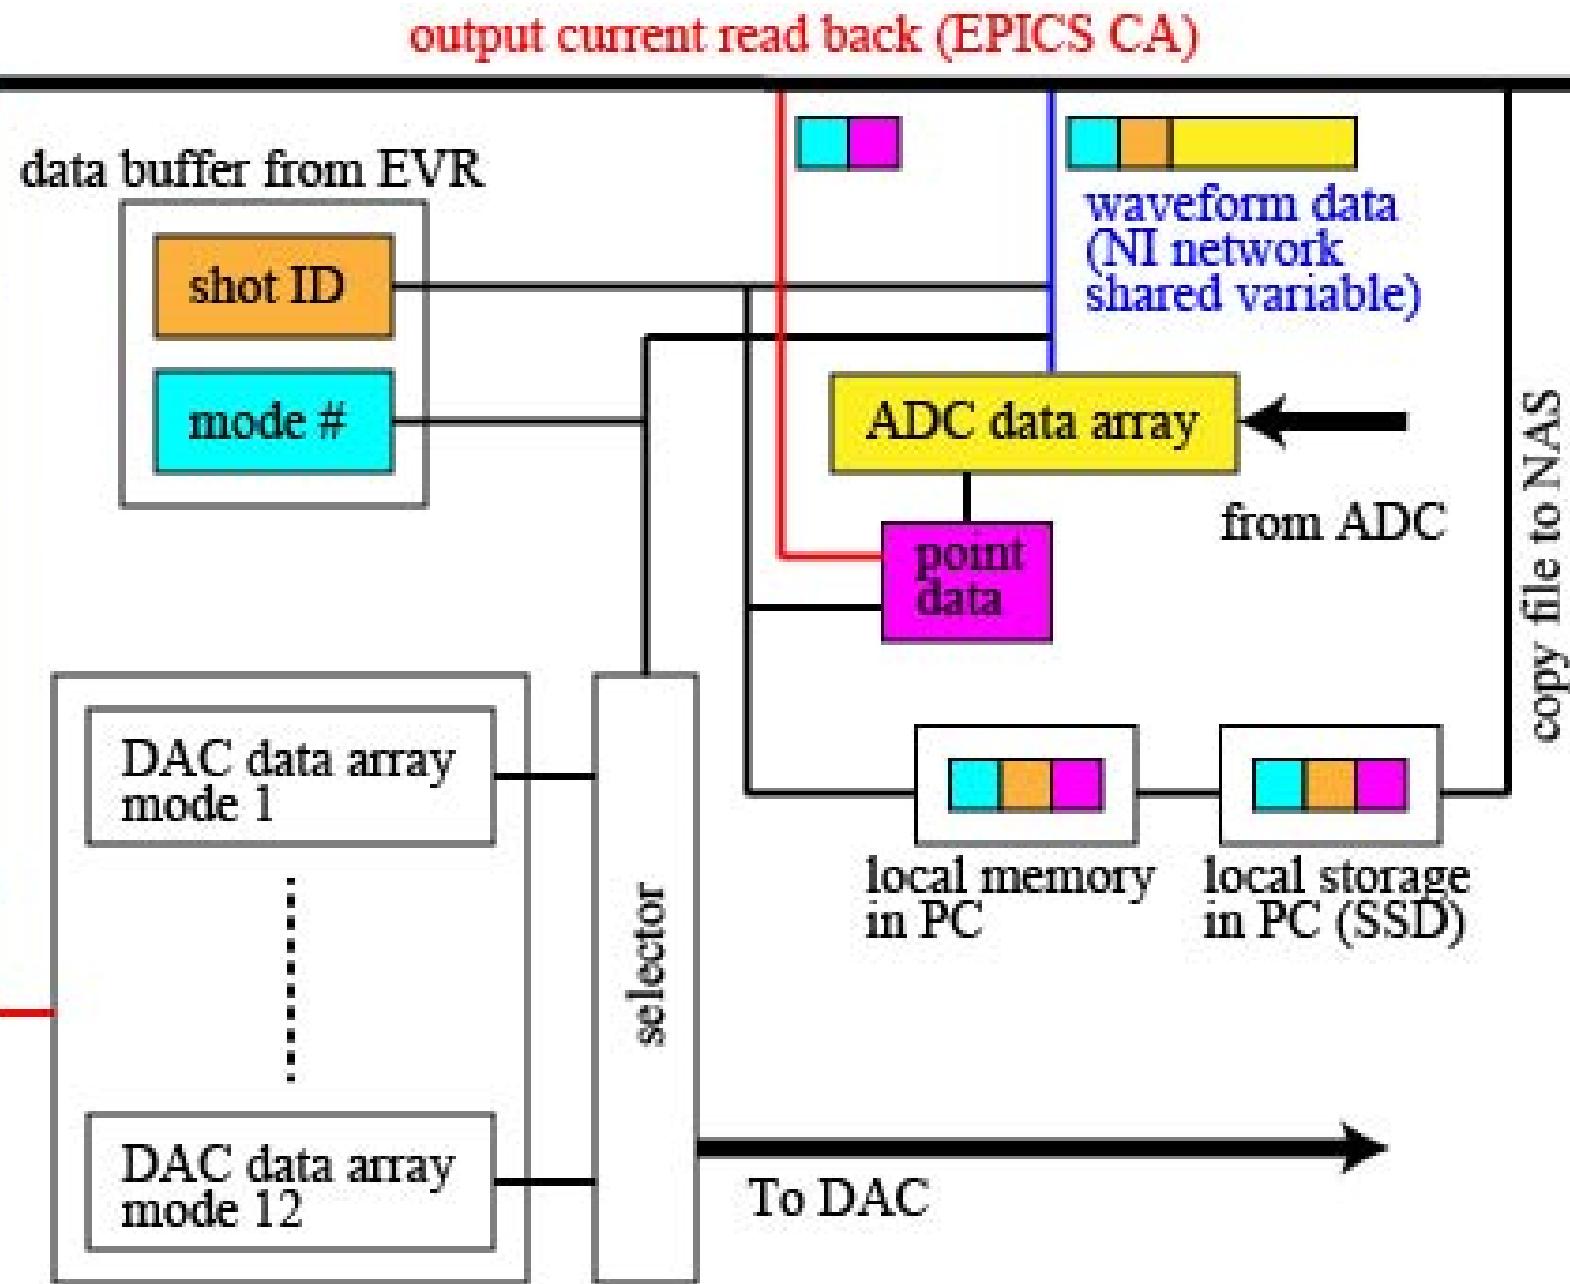



Data flow in main program

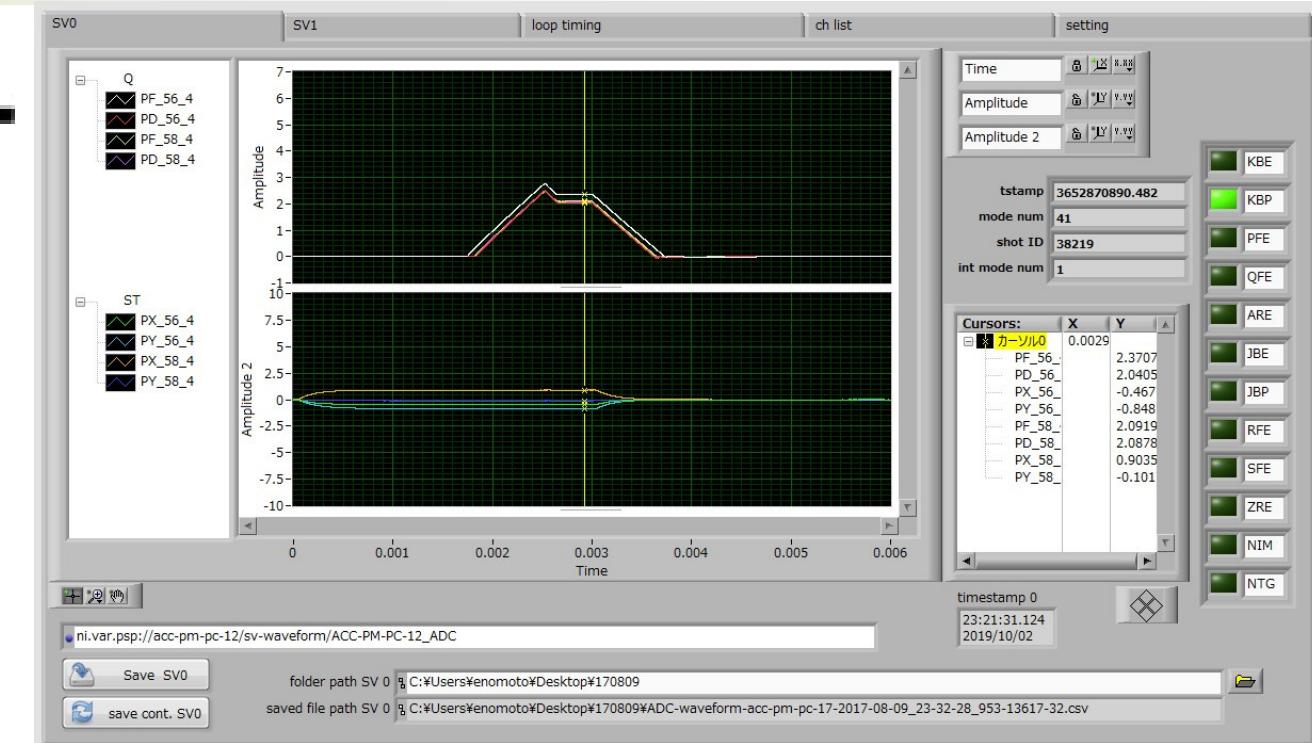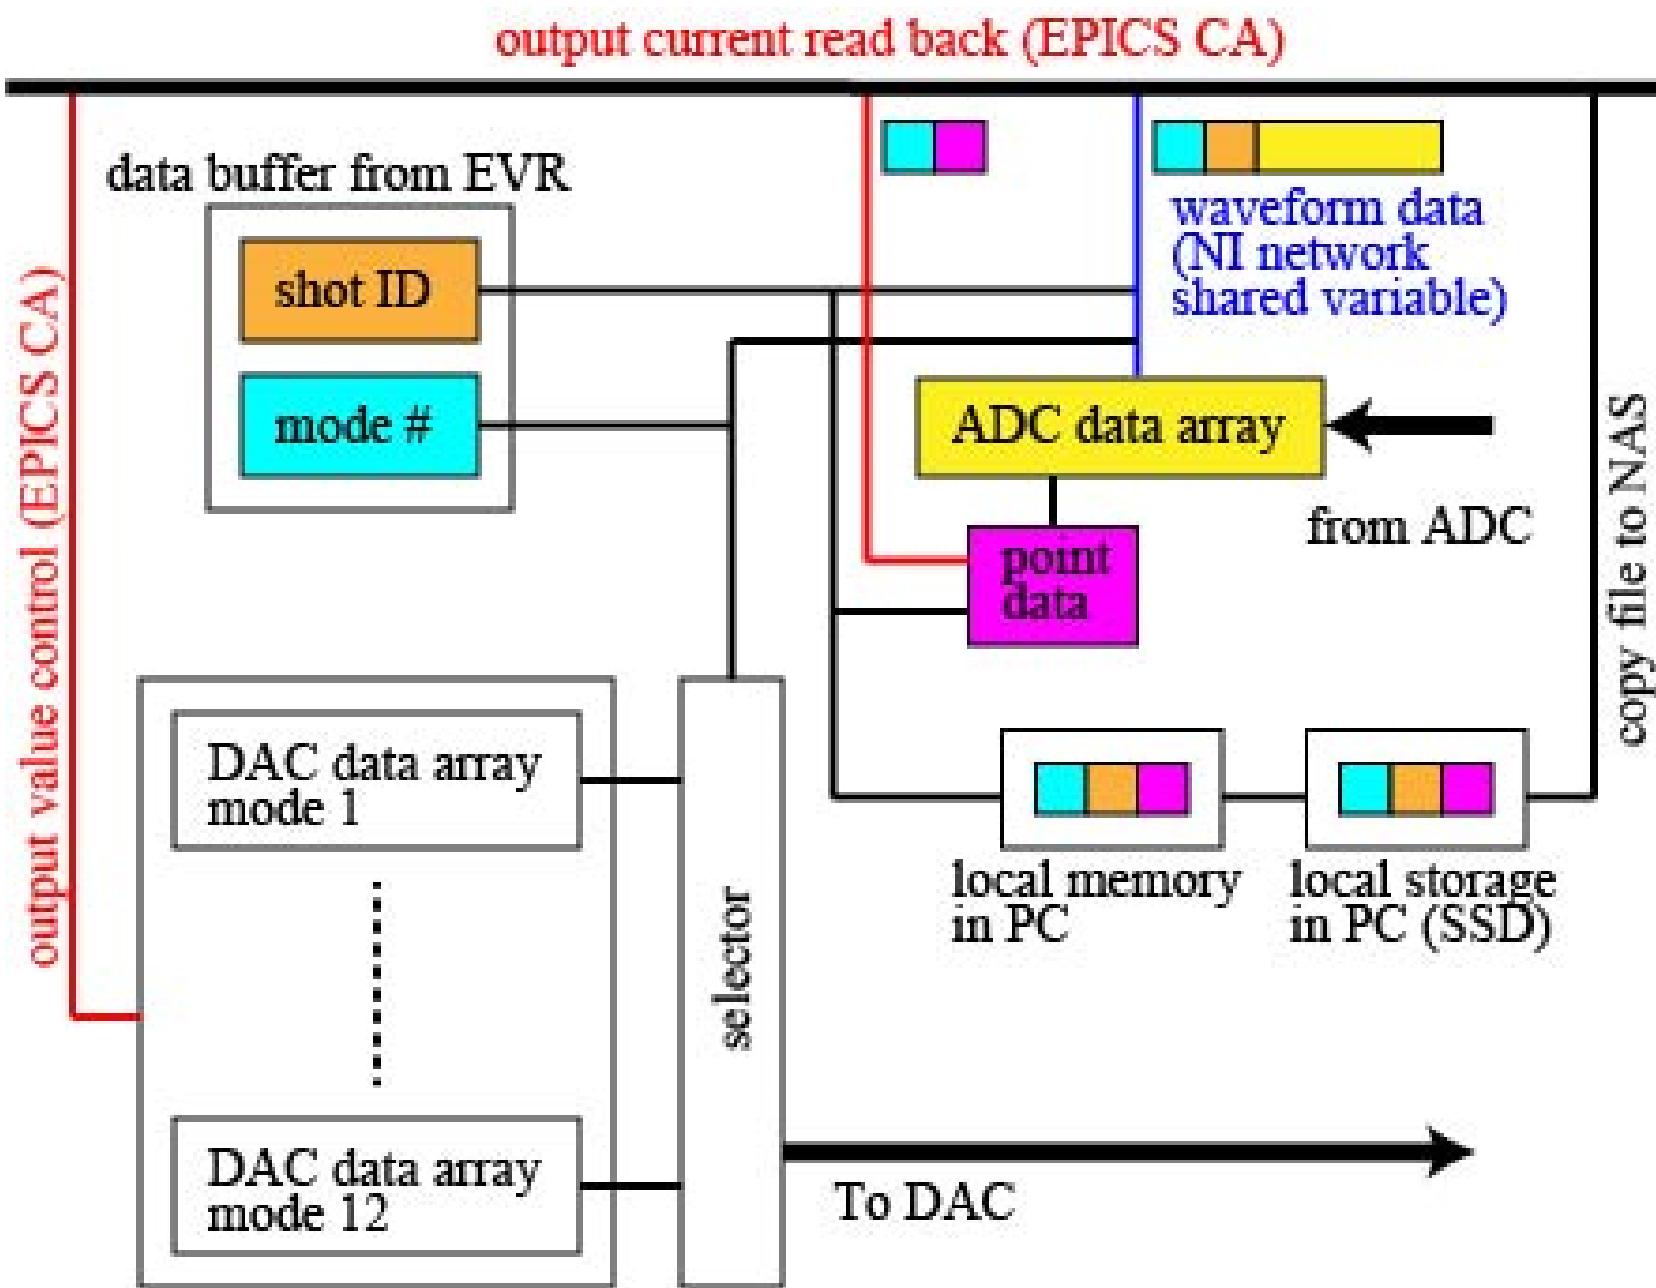

Point data (8 ch x 1 point @ beam timing) is extracted from ADC data array (8 ch x waveform) and stored in the PV with appropriate mode name

Data flow in main program

output value control (EPICS CA)

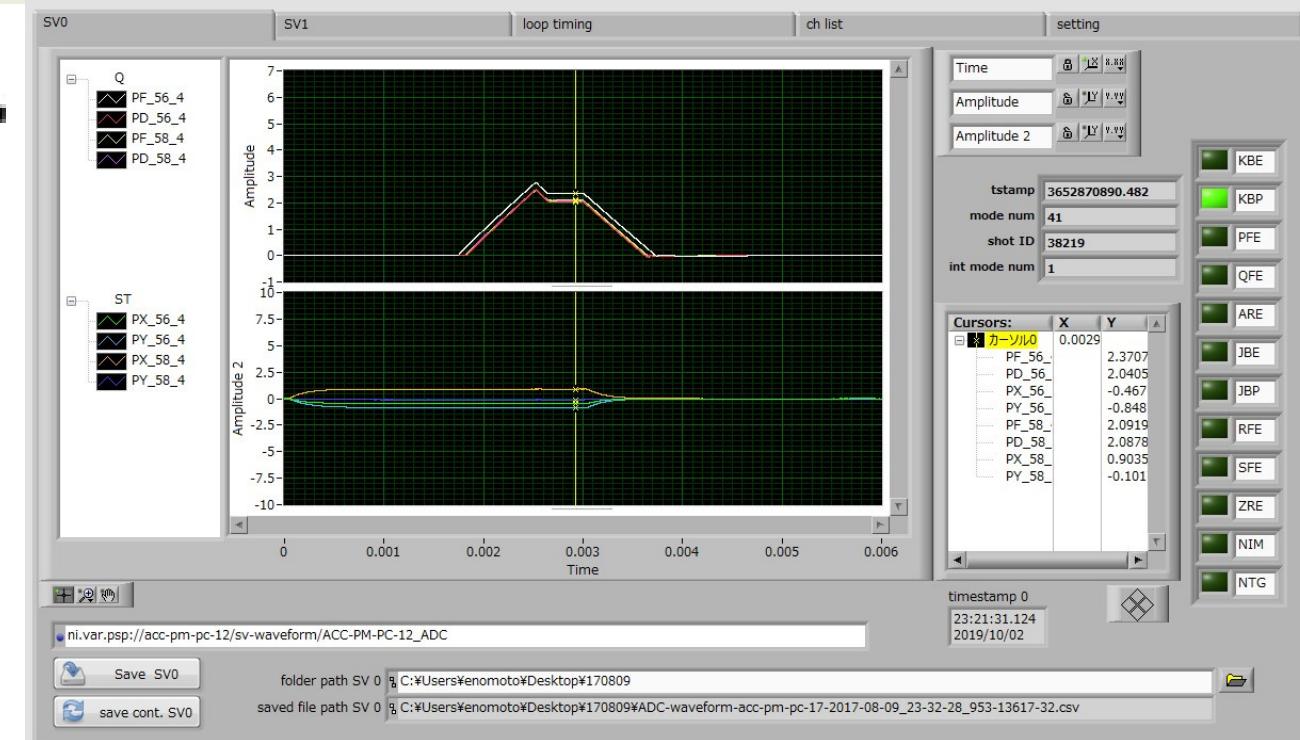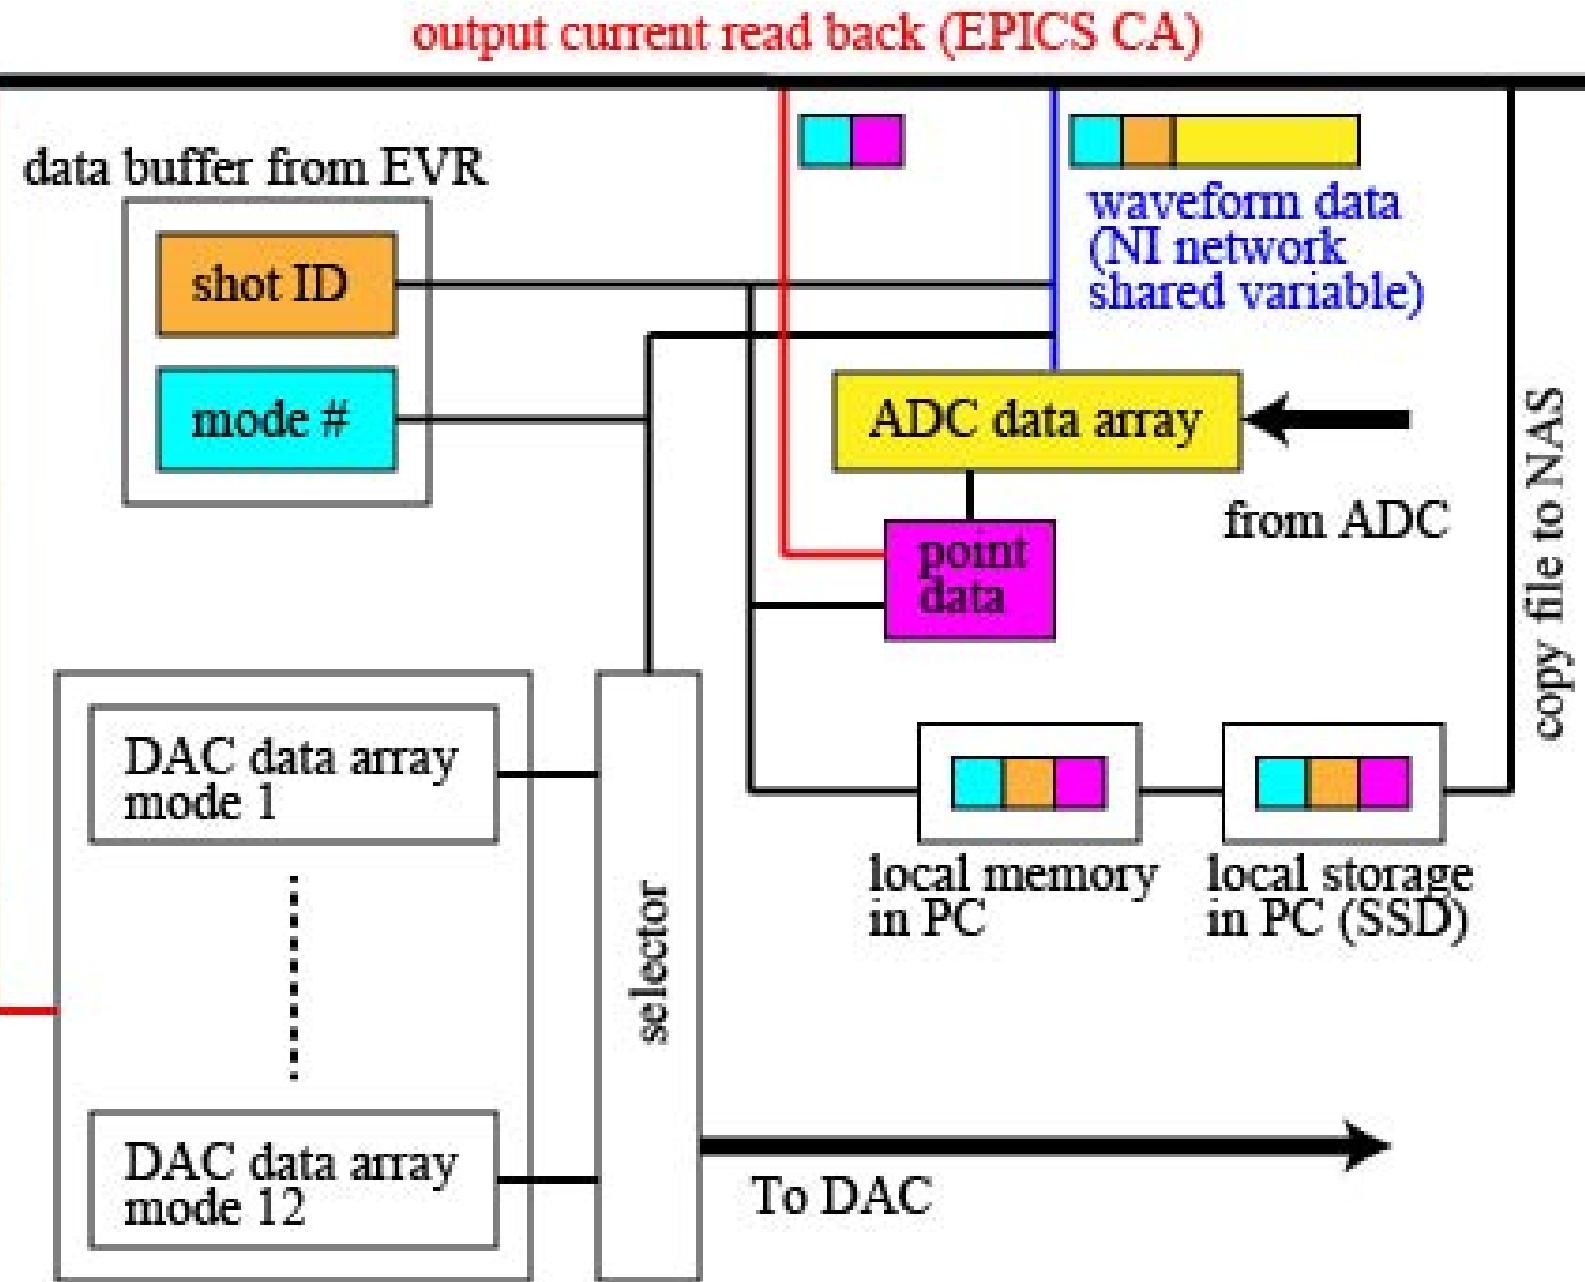

Point data (8 ch x 1 point @ beam timing) is extracted from ADC data array (8 ch x waveform) and stored in the PV with appropriate mode name

Prefix:magnet name:type:mode
 LliMG:PF_32_4:IREAD_R:KBE
 LliMG:PF_32_4:IREAD_R:KBP
 LliMG:PF_32_4:IREAD_R:PFE

Data in log files

Mode number = destination of the beam

Current read back


Current setting

A	B	C	D	E	G	H	I	J	K	L	M	N	O		
1	tstamp	mode	shot_ID	internal_mode	ADC_ch0	ADC_ch1	ADC_ch2	ADC_ch3	ADC_ch4	ADC_ch5	ADC_ch6	ADC_ch7	DAC_ch0	DAC_ch1	DAC_ch2
2	3652624504.919	181	39644	10	-0.0051	-0.0045	0.0002	0.0002	-0.0059	-0.001	-0.0006	-0.0007	-0.006	-0.0042	-0.001
3	3652624504.940	181	39645	10	-0.0039	-0.0053	0	0.0003	-0.0059	-0.0011	-0.0009	-0.0011	-0.006	-0.0042	-0.001
4	3652624504.959	181	39646	10	-0.0041	-0.0054	0.0001	0.0003	-0.006	-0.0009	-0.0006	-0.0005	-0.006	-0.0042	-0.001
5	3652624504.979	41	39647	1	82.2347	82.2852	-2.9986	0.8595	86.363	88.5796	-1.6337	-0.2241	82.235	82.234	0.001
6	3652624504.998	31	39648	0	158.9922	159.12	-2.5993	0.2494	169.0895	170.5758	-3.505	1.6445	158.79	158.79	0.001
7	3652624505.020	181	39649	10	-0.0057	-0.0052	0.0003	0.0003	-0.0056	-0.0013	-0.0011	-0.0008	-0.006	-0.0042	-0.001
8	3652624505.039	181	39650	10	-0.0035	-0.0052	-0.0001	0.0002	-0.0054	0.0008	-0.0011	-0.0007	-0.006	-0.0042	-0.001
9	3652624505.059	181	39651	10	-0.005	-0.0054	0.0001	0.0004	-0.0048	0.0065	-0.0007	-0.0006	-0.006	-0.0042	-0.001
10	3652624505.079	181	39652	10	-0.0047	-0.0052	0.0001	0.0003	-0.006	-0.0029	-0.001	-0.001	-0.006	-0.0042	-0.001
11	3652624505.099	181	39653	10	-0.0026	-0.0056	0.0002	0.0003	-0.0056	0.0013	-0.0009	-0.0006	-0.006	-0.0042	-0.001
12	3652624505.119	181	39654	10	-0.0047	-0.0053	0	0.0001	-0.0059	-0.002	-0.001	-0.0008	-0.006	-0.0042	-0.001
13	3652624505.139	181	39655	10	-0.0047	-0.0059	0.0001	0.0002	-0.0059	-0.0027	-0.0007	-0.0007	-0.006	-0.0042	-0.001
14	3652624505.159	181	39656	10	-0.003	-0.0056	-0.0001	0.0003	-0.0053	-0.0005	-0.0004	-0.0004	-0.006	-0.0042	-0.001
15	3652624505.179	41	39657	1	82.223	82.2783	-2.9988	0.8593	86.3677	88.5721	-1.6339	-0.2243	82.235	82.234	0.001
16	3652624505.198	31	39658	0	158.977	159.1255	-2.5993	0.2493	169.0817	170.5824	-3.5052	1.644	158.79	158.79	0.001
17	3652624505.218	181	39659	10	-0.0048	-0.0053	0.0004	0.0005	-0.0055	-0.0008	-0.0014	-0.0009	-0.006	-0.0042	-0.001

Each row contains information about each pulse.

A new file is created when the size of previous one is larger than 10 MB.
Data size is about 3 TB / year in total.

Trigger dropping rate

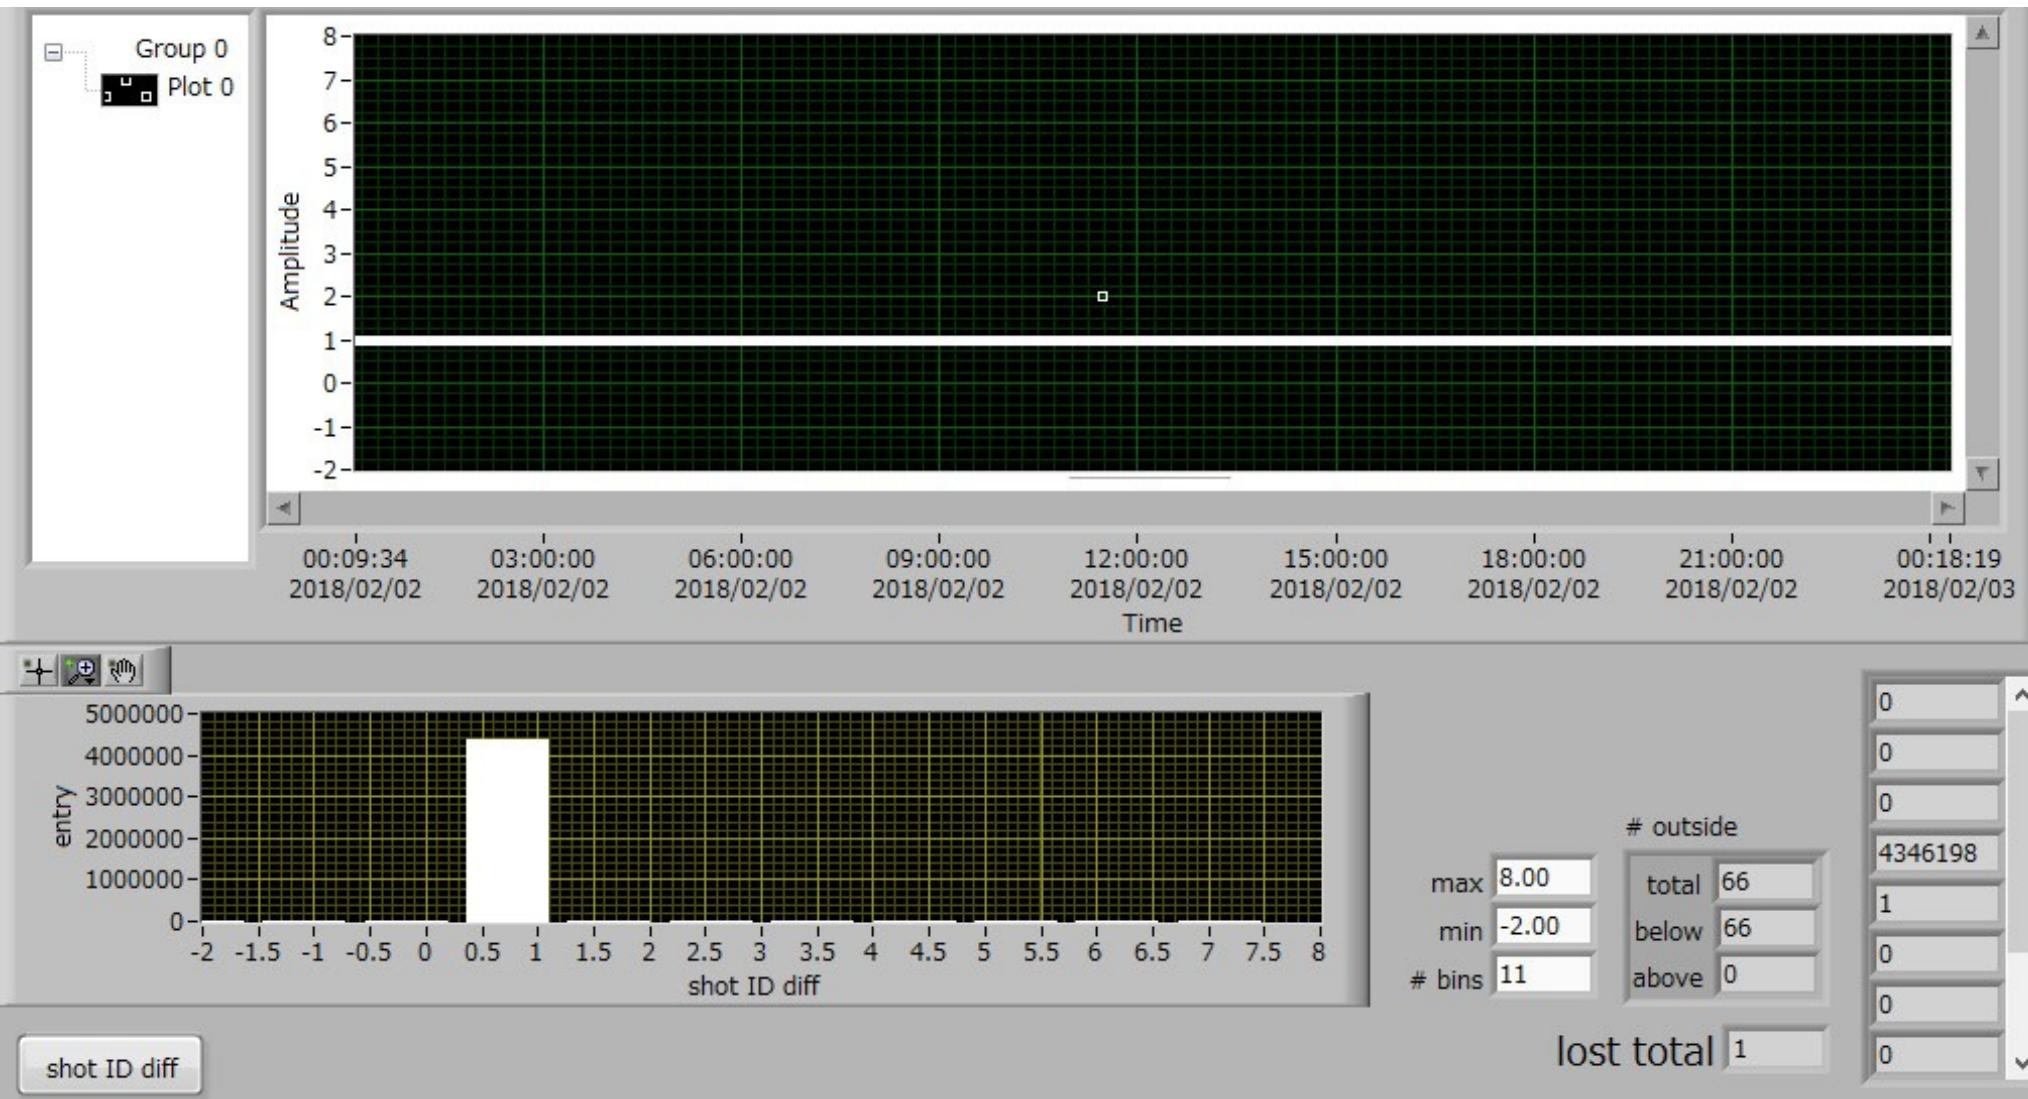

Difference of shot ID between adjacent pulses from log data for one day.

- A few drop per day for one unit
- $50 \text{ Hz} \times 24 \text{ hour} \times 3600 \text{ sec} = 4.32 \text{ million}$
- Dropping rate is less than 1 ppm

Even though Windows is not a real-time OS, practically it works as we want.
This is a kind of brute-force solution.
Machine power and careful software writing is important.

Long term Stability

- Concern about long term stability of the LabVIEW on Windows. (I was asked by many people....)

Long term Stability

- Concern about long term stability of the LabVIEW on Windows. (I was asked by many people....)
 - 20 units are running (16 units for operation, 1 unit for test and 3 units for other purpose) for two years.

Long term Stability

- Concern about long term stability of the LabVIEW on Windows. (I was asked by many people....)
 - 20 units are running (16 units for operation, 1 unit for test and 3 units for other purpose) for two years.
 - There is no need to reboot PC during run (usually 3 to 6 months) except for a few specific units.
 - Maybe due to HW issue

Long term Stability

- Concern about long term stability of the LabVIEW on Windows. (I was asked by many people....)
 - 20 units are running (16 units for operation, 1 unit for test and 3 units for other purpose) for two years.
 - There is no need to reboot PC during run (usually 3 to 6 months) except for a few specific units.
 - Maybe due to HW issue
 - There is no need to restart software.

Long term Stability

- Concern about long term stability of the LabVIEW on Windows. (I was asked by many people....)
 - 20 units are running (16 units for operation, 1 unit for test and 3 units for other purpose) for two years.
 - There is no need to reboot PC during run (usually 3 to 6 months) except for a few specific units.
 - Maybe due to HW issue
 - There is no need to restart software.

Not perfect but acceptable

There are many devices which is less stable than this one....

summary

- About 100 pulsed magnet were installed to realize simultaneous top up injection to 4 different storage rings
- Setting current and destination can be changed every 20 ms
- COTS devices are used for control system to reduce development cost and time
- PXI / PXI express with MRF's Event Timing System is adopted
- Software is written by LabVIEW with EPICS modules.
- Real-timeness and long term stability are not perfect but acceptable for present operation.

members

- K. Furukawa
 - Adviser, management of the project, timing system
- T. Kamitani
 - Magnet design
- F. Miyahara
 - Timing system
- T. Natsui
 - Energy recovery pulse driver
- M. Satoh
 - Timing and control system, software
- K. Yokoyama
 - Magnet design
- M. Yoshida
 - Energy recovery pulse driver
- S. Ushimoto
 - cRIO interlock and data acquisition system
- H. Satome
 - Device driver for event receiver

Thank you
for your attention!